


# Specification

Curve Lighting System

AH5060-15A45/15A90





# AH5060-15A45/15A90



## Features

- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

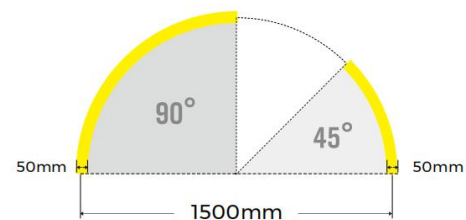






## Details



## Optional Accessories



Picture	Item	Parameter
	①Profile	Profile weight : 0.7kg / D1500mm , 45° Size : 50x60mm , D1500mm , 45 50x60mm , D1500mm , 90° Material : AL6063-T5 Surface processing: Spray
	②Cover	35 cover Size : L20000*W32*H3.5mm 50 cover Size : L20000*W47*H4mm Light transmittance: 60%
	③End cap	Size : L60*W50*H2mm
	④Rigid modular DY8140-24V-20mm-15A45	Material:AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 11.6W/pcs ; Lumen : 1300Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs ;
	⑤Screw set CL-15	Size : M3.5*50mm



Picture	Item	Parameter
	Pendant cable PY-CBDD	Size : $\phi 350 \times H20$ mm
	Pendant cable PN-WA2/4	Steel cable: D1.5*2000\4000mm\maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size:20AWG\2000mm\maximum load bearing:6.5Kg
	Connect fitting EX-25	Size : L39.5*W20*H12mm
	Clips CP-29	

## Optical Parameter

AH5060-15A45 module/DY8140-24V-20mm-15A45 light source, frosted diffuser

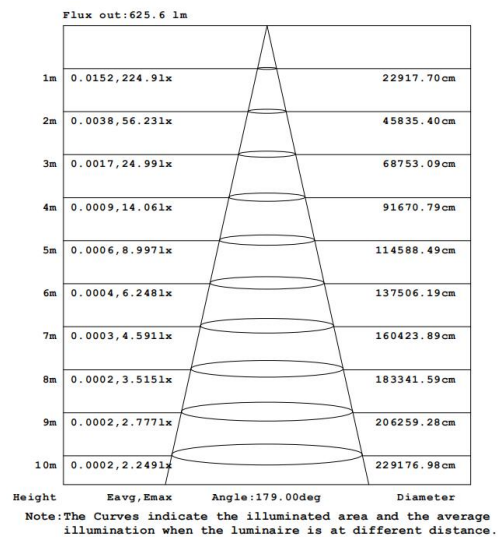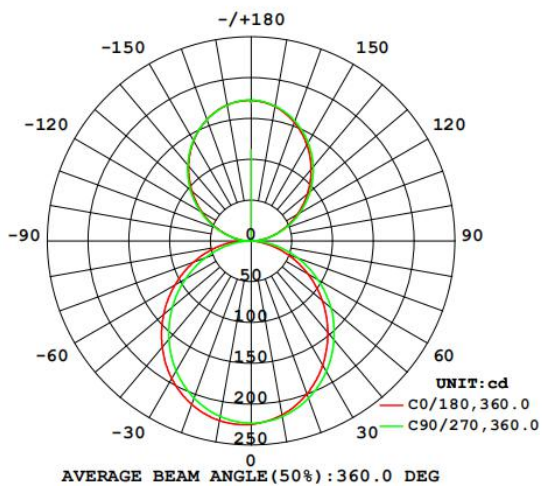

## Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
15A45	Hat box	675*320*185mm	8.4	11.4	12pcs/box
15A90	Hat box	1180*515*185mm	21.96	24.96	12pcs/box

