
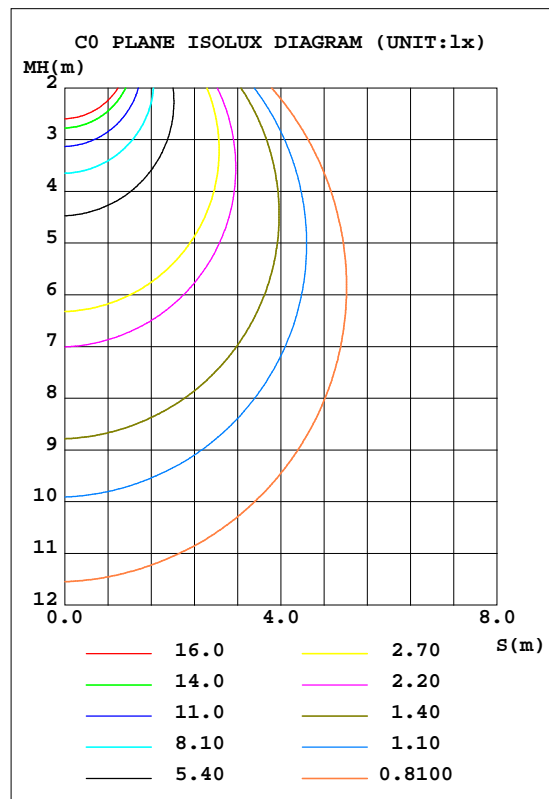


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 52.03 lm/W
MODEL	AS3535-08A45	I _{max} (cd)	108.1	S/MH(C0/180)		1.26
NOMINAL POWER(W)	5.6	LOR(%)	100.0	S/MH(C90/270)		1.24
RATED VOLTAGE(V)	24	TOTAL FLUX(lm)	291.40	h UP, DN(C0-180)		0.8,45.7
NOMINAL FLUX(lm)	291.395	CIE CLASS	DIRECT	h UP, DN(C180-360)		0.7,52.8
LAMPS INSIDE	1	h up(%)	1.5	CIBSE SHR NOM		1.25
TEST VOLTAGE(V)	24	h down(%)	98.5	CIBSE SHR MAX		1.35

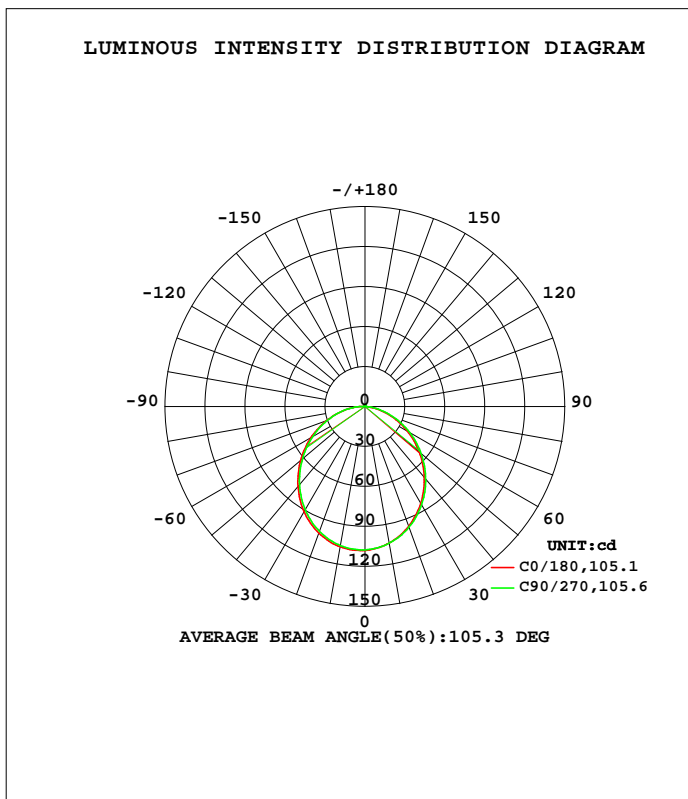

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	104.1	104.5	104.2	104.2	107.0	106.3	106.0	105.7	0- 10	10.16	10.16	3.49,3.49
20	95.81	96.67	96.51	96.54	101.2	100.2	99.82	99.53	10- 20	28.84	39.00	13.4,13.4
30	83.86	85.17	85.05	85.16	91.37	90.03	89.66	89.38	20- 30	42.96	81.96	28.1,28.1
40	69.33	71.06	70.92	71.13	78.26	76.88	76.46	76.51	30- 40	50.60	132.6	45.5,45.5
50	53.28	55.12	55.10	55.30	63.10	61.70	61.39	61.82	40- 50	51.10	183.7	63,63
60	36.64	38.64	38.54	38.86	46.90	45.46	45.41	46.15	50- 60	44.94	228.6	78.5,78.5
70	20.49	22.16	22.21	22.49	30.47	29.12	29.72	30.16	60- 70	33.55	262.2	90,90
80	6.082	7.284	7.381	7.598	14.92	14.23	14.90	14.91	70- 80	19.22	281.4	96.6,96.6
90	0.3407	0.2672	0.3608	0.3739	1.898	1.623	2.103	1.873	80- 90	5.556	286.9	98.5,98.5
100	0.3407	0.3276	0.3273	0.3807	0.1136	0.2939	0.5611	0.4144	90-100	0.4500	287.4	98.6,98.6
110	0.4273	0.4681	0.4074	0.4951	0.2874	0.4139	0.5678	0.4141	100-110	0.4060	287.8	98.8,98.8
120	0.6279	0.7014	0.6277	0.7153	0.4478	0.5542	0.6614	0.5010	110-120	0.5175	288.3	98.9,98.9
130	0.8350	0.9490	0.9013	0.9424	0.6218	0.7144	0.7749	0.6479	120-130	0.6269	288.9	99.2,99.2
140	1.042	1.203	1.135	1.203	0.7953	0.8414	0.9085	0.8197	130-140	0.6917	289.6	99.4,99.4
150	1.215	1.450	1.363	1.436	0.9419	1.022	1.042	0.9284	140-150	0.6807	290.3	99.6,99.6
160	1.376	1.610	1.576	1.596	1.122	1.142	1.156	1.042	150-160	0.5800	290.9	99.8,99.8
170	1.476	1.502	1.563	1.490	1.256	1.109	1.116	1.075	160-170	0.3810	291.3	100,100
180	1.429	1.443	1.456	1.423	1.383	1.396	1.423	1.383	170-180	0.1269	291.4	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

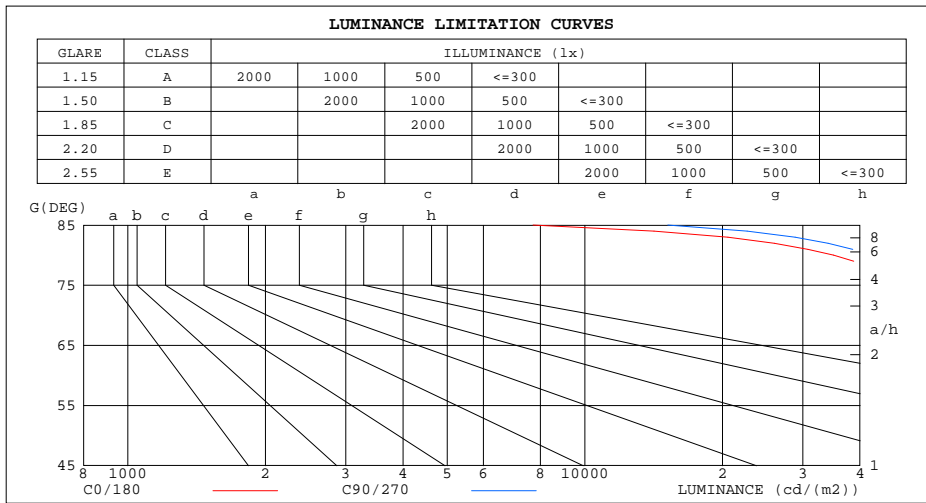


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

G Range: 0 - 180DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.10	1.10	1.10	1.05	1.05	1.05	1.01	1.01	1.01	.98
1.0	1.04	.90	.96	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.81	.77	.73	.78	.74	.71	.69
3.0	.80	.72	.65	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.65	.61	.58
4.0	.71	.62	.55	.69	.61	.55	.67	.60	.54	.64	.58	.53	.62	.56	.52	.50
5.0	.63	.54	.48	.62	.54	.47	.60	.52	.47	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.42	.56	.48	.42	.54	.47	.41	.52	.46	.41	.50	.45	.40	.38
7.0	.52	.43	.37	.51	.43	.37	.49	.42	.36	.48	.41	.36	.46	.40	.36	.34
8.0	.47	.39	.33	.46	.38	.33	.45	.38	.33	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.30	.43	.35	.30	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.27	.40	.32	.27	.38	.31	.27	.37	.31	.27	.36	.31	.26	.25

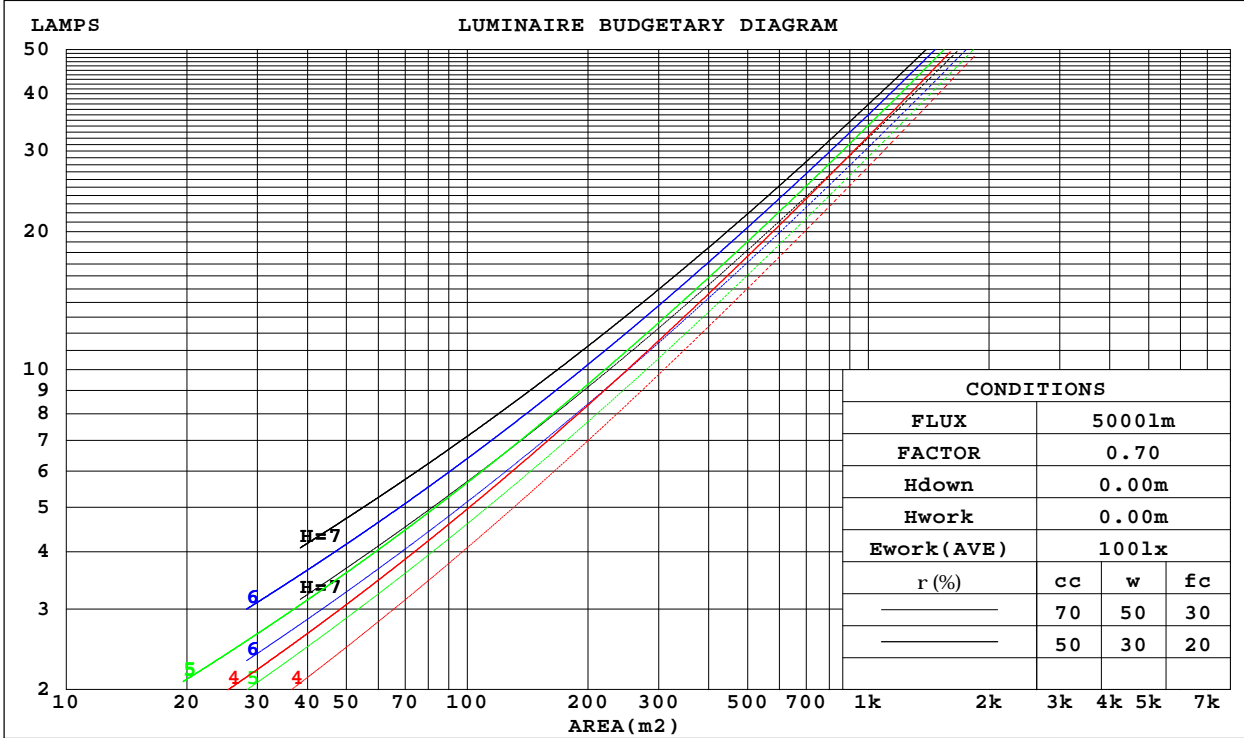

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.305	.173	.055	.298	.170	.054	.283	.163	.052	.270	.156	.050	.259	.150	.048	
2.0	.287	.157	.048	.280	.154	.048	.268	.149	.046	.256	.144	.045	.246	.139	.044	
3.0	.266	.141	.042	.260	.139	.042	.249	.135	.041	.238	.131	.040	.229	.127	.039	
4.0	.245	.127	.037	.240	.126	.037	.230	.122	.036	.221	.119	.036	.213	.116	.035	
5.0	.227	.116	.034	.222	.114	.033	.214	.111	.033	.205	.108	.032	.198	.106	.032	
6.0	.211	.106	.030	.207	.104	.030	.199	.102	.030	.191	.099	.029	.185	.097	.029	
7.0	.196	.097	.028	.193	.096	.027	.186	.094	.027	.179	.092	.027	.173	.090	.026	
8.0	.183	.090	.025	.180	.089	.025	.174	.087	.025	.168	.085	.025	.162	.083	.024	
9.0	.172	.083	.023	.169	.082	.023	.163	.081	.023	.158	.079	.023	.153	.078	.022	
10.0	.162	.078	.022	.159	.077	.021	.154	.075	.021	.149	.074	.021	.145	.073	.021	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.202	.202	.202	.173	.173	.173	.118	.118	.118	.068	.068	.068	.022	.022	.022	
1.0	.192	.168	.146	.164	.144	.126	.112	.099	.087	.065	.057	.051	.021	.018	.016	
2.0	.183	.144	.110	.157	.124	.095	.108	.086	.067	.062	.050	.039	.020	.016	.013	
3.0	.176	.126	.087	.150	.109	.075	.103	.076	.053	.060	.044	.031	.019	.014	.010	
4.0	.168	.113	.071	.144	.098	.062	.099	.068	.043	.057	.040	.026	.018	.013	.008	
5.0	.160	.102	.060	.138	.089	.052	.095	.062	.037	.055	.036	.022	.018	.012	.007	
6.0	.153	.094	.052	.132	.081	.045	.091	.057	.032	.053	.034	.019	.017	.011	.006	
7.0	.147	.087	.046	.126	.076	.040	.087	.053	.028	.051	.031	.017	.016	.010	.006	
8.0	.140	.081	.041	.121	.071	.036	.083	.050	.025	.049	.029	.015	.016	.010	.005	
9.0	.134	.076	.038	.116	.066	.033	.080	.047	.023	.047	.028	.014	.015	.009	.005	
10.0	.128	.072	.035	.111	.063	.030	.077	.044	.022	.045	.026	.013	.015	.009	.004	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm										
NAME: AS3535-08A45					TYPE:			WEIGHT:		
SPEC.:AS3535-08A45					DIM.: 300*35*35			SERIAL No.:		
MFR.: COLORS					SUR.:300*35			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	31.8	33.3	32.1	33.6	33.8	32.0	33.5	32.3	33.7	34.0
3H	33.1	34.4	33.4	34.7	34.9	33.3	34.7	33.6	34.9	35.2
4H	33.5	34.8	33.8	35.0	35.3	33.7	35.0	34.1	35.3	35.6
6H	33.6	34.9	34.0	35.2	35.5	34.0	35.2	34.3	35.5	35.8
8H	33.6	34.8	34.0	35.1	35.5	34.0	35.2	34.4	35.5	35.8
12H	33.6	34.7	34.0	35.1	35.4	34.0	35.1	34.4	35.5	35.8
4H 2H	32.4	33.7	32.7	34.0	34.3	32.5	33.8	32.9	34.1	34.4
3H	33.8	34.9	34.2	35.2	35.6	34.0	35.1	34.4	35.4	35.8
4H	34.3	35.3	34.7	35.7	36.0	34.5	35.6	34.9	35.9	36.3
6H	34.6	35.5	35.0	35.9	36.3	34.9	35.8	35.3	36.2	36.6
8H	34.6	35.5	35.0	35.8	36.3	34.9	35.8	35.4	36.2	36.6
12H	34.6	35.4	35.0	35.8	36.2	34.9	35.7	35.4	36.1	36.6
8H 4H	34.5	35.3	34.9	35.7	36.2	34.7	35.6	35.2	36.0	36.4
6H	34.9	35.6	35.3	36.0	36.5	35.2	35.9	35.6	36.3	36.8
8H	34.9	35.6	35.4	36.0	36.5	35.3	35.9	35.7	36.3	36.8
12H	34.9	35.5	35.4	35.9	36.4	35.3	35.8	35.8	36.3	36.8
12H 4H	34.5	35.3	34.9	35.7	36.1	34.7	35.5	35.2	35.9	36.3
6H	34.9	35.5	35.4	36.0	36.4	35.2	35.8	35.6	36.2	36.7
8H	35.0	35.5	35.5	36.0	36.5	35.3	35.8	35.8	36.3	36.8
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
1.5H	+ 0.2 / - 0.4					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.3				

CIE Pub.117, 291.4 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -4.3)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	58	47	40	57	46	40	56	46	39	33
0.80	68	57	49	67	56	49	65	55	49	42
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	65	57
1.50	88	78	72	86	77	71	83	76	70	62
2.00	95	87	80	93	85	79	89	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	77
4.00	106	100	96	104	98	94	99	95	91	82
5.00	108	104	100	106	102	98	101	98	95	85
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

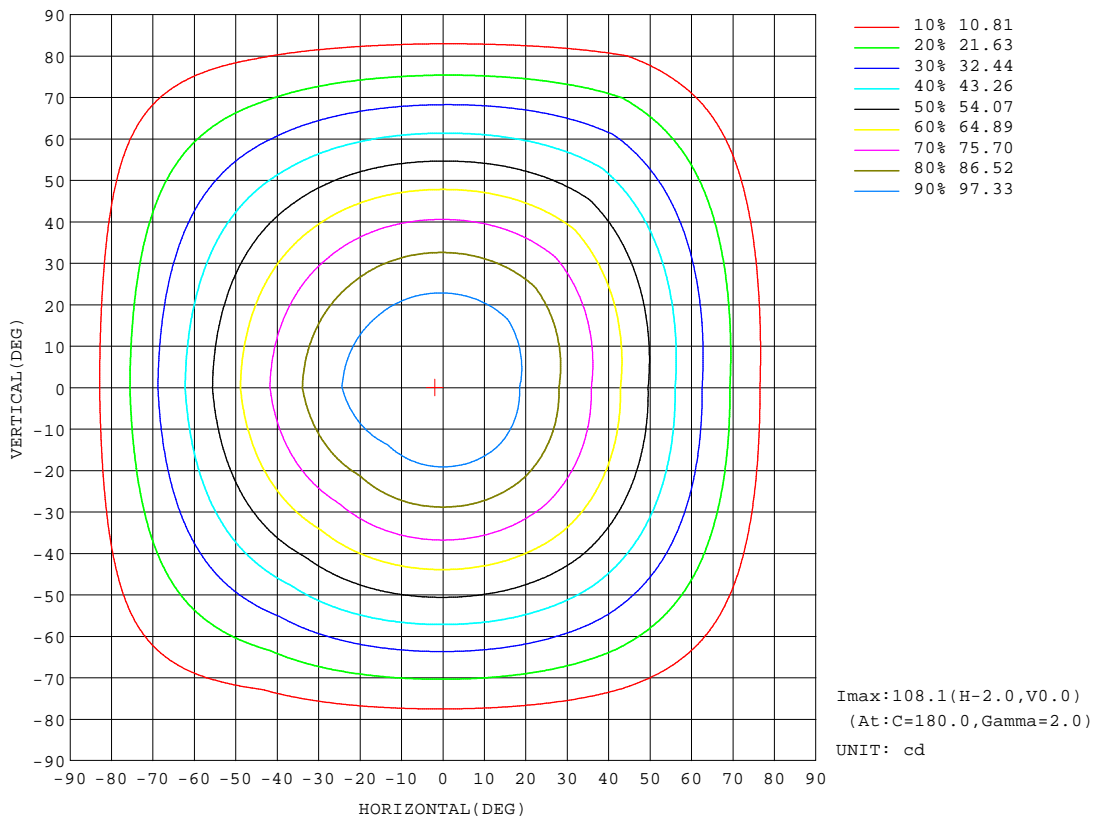


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

Flux out:198.1 lm

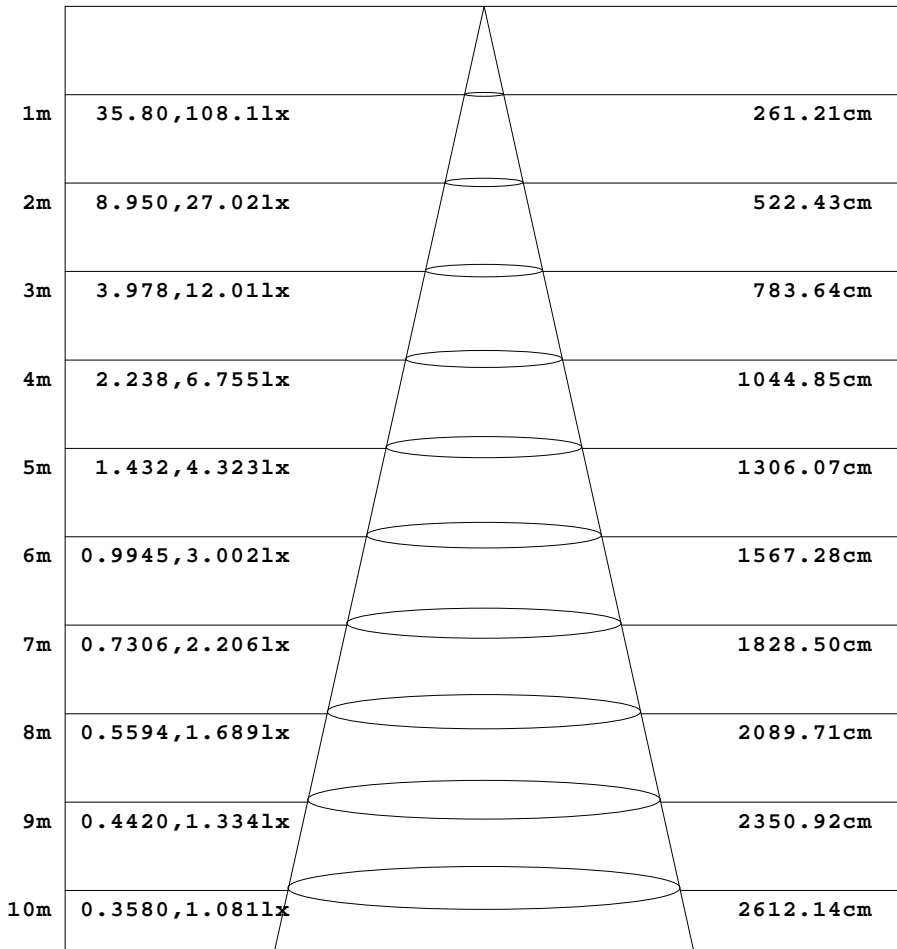

Height Eavg, Emax Angle:105.12deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

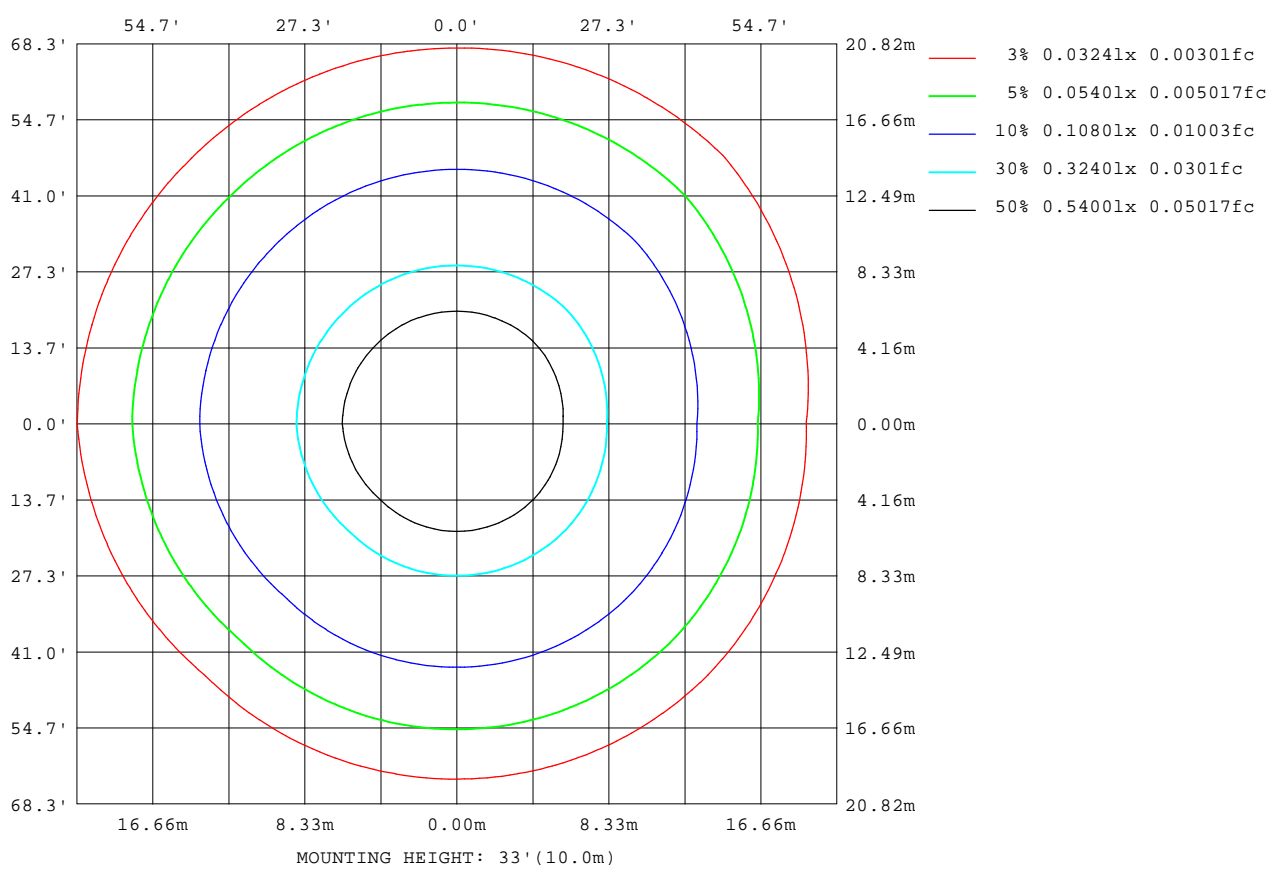

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	79331
L_0~180(75)av	68536
L_0~180(85)av	49366
L_90~270(65)av	80156
L_90~270(75)av	70873
L_90~270(85)av	53884
L_45(65)av	80570
L_45(75)av	70474
L_45(85)av	51774

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

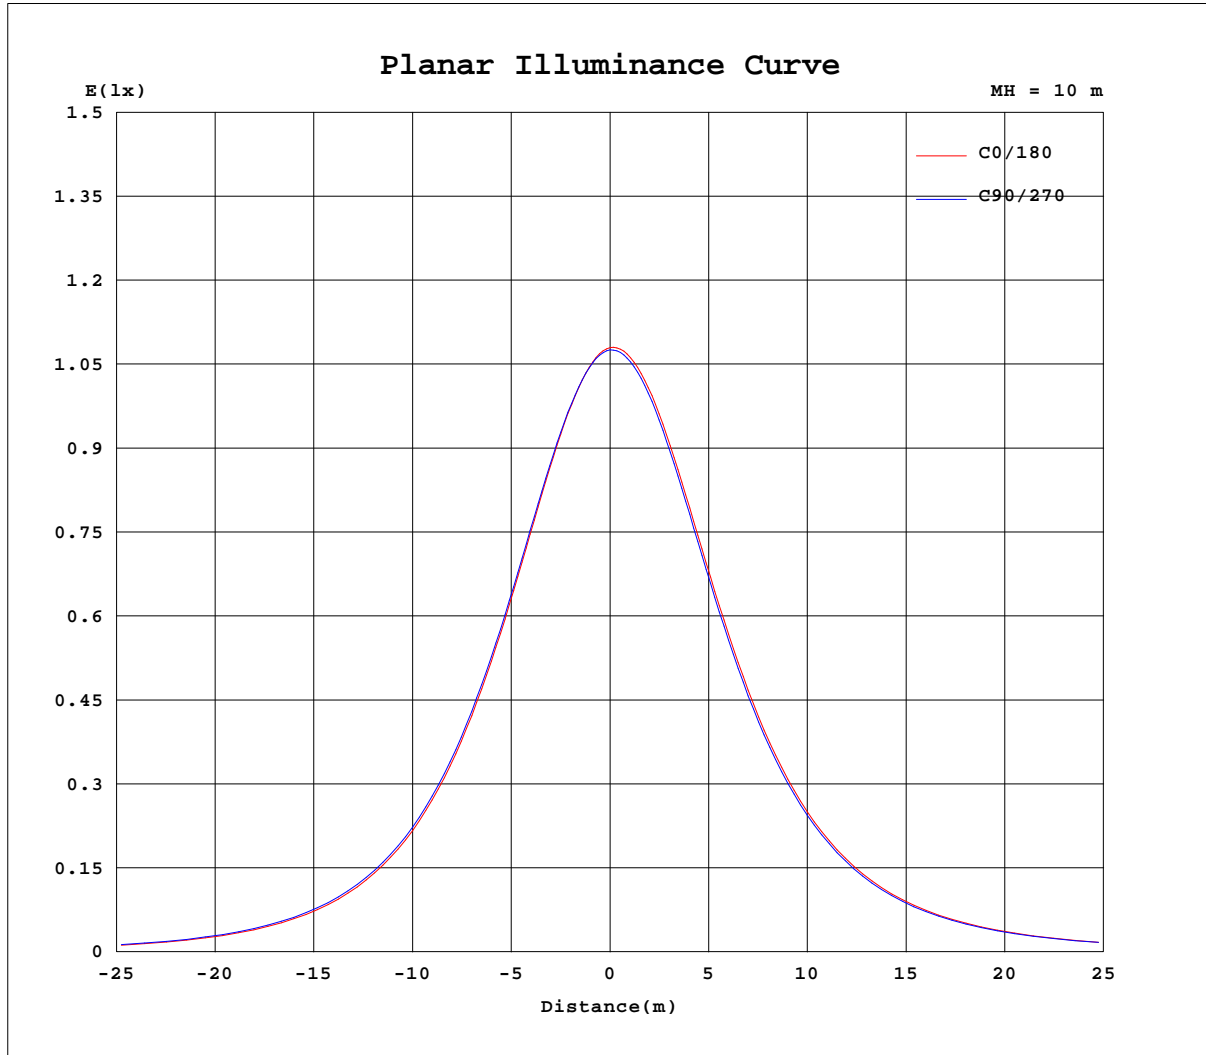

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2020-04-09

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:24.00V I:0.2360A P:5.600W PF:1.000 Freq:0Hz Lamp Flux:291.395x1 lm		
NAME: AS3535-08A45	TYPE:	WEIGHT:
SPEC.:AS3535-08A45	DIM.: 300*35*35	SERIAL No.:
MFR.: COLORS	SUR.:300*35	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	108	108	108	107	108	108	108	107										
5	107	107	107	106	108	108	107	107										
10	104	104	104	104	107	106	106	106										
15	101	101	101	101	105	104	103	103										
20	95.8	96.7	96.5	96.5	101	100	99.8	99.5										
25	90.2	91.4	91.2	91.3	96.7	95.5	95.2	94.9										
30	83.9	85.2	85.0	85.2	91.4	90.0	89.7	89.4										
35	76.9	78.4	78.3	78.4	85.1	83.8	83.3	83.2										
40	69.3	71.1	70.9	71.1	78.3	76.9	76.5	76.5										
45	61.4	63.2	63.2	63.3	70.9	69.5	69.1	69.4										
50	53.3	55.1	55.1	55.3	63.1	61.7	61.4	61.8										
55	45.0	47.0	46.9	47.2	55.1	53.7	53.4	54.1										
60	36.6	38.6	38.5	38.9	46.9	45.5	45.4	46.2										
65	28.4	30.3	30.3	30.6	38.6	37.2	37.5	38.1										
70	20.5	22.2	22.2	22.5	30.5	29.1	29.7	30.2										
75	13.0	14.4	14.5	14.7	22.5	21.4	22.2	22.4										
80	6.08	7.28	7.38	7.60	14.9	14.2	14.9	14.9										
85	0.67	1.25	1.32	1.50	7.93	7.44	8.07	7.87										
90	0.34	0.27	0.36	0.37	1.90	1.62	2.10	1.87										
95	0.34	0.29	0.33	0.37	0.05	0.27	0.63	0.44										
100	0.34	0.33	0.33	0.38	0.11	0.29	0.56	0.41										
105	0.34	0.38	0.33	0.41	0.20	0.38	0.56	0.41										
110	0.43	0.47	0.41	0.50	0.29	0.41	0.57	0.41										
115	0.51	0.58	0.52	0.60	0.36	0.51	0.60	0.45										
120	0.63	0.70	0.63	0.72	0.45	0.55	0.66	0.50										
125	0.71	0.82	0.75	0.83	0.55	0.62	0.72	0.60										
130	0.83	0.95	0.90	0.94	0.62	0.71	0.77	0.65										
135	0.94	1.08	1.03	1.08	0.71	0.80	0.84	0.74										
140	1.04	1.20	1.14	1.20	0.80	0.84	0.91	0.82										
145	1.15	1.34	1.26	1.32	0.88	0.94	0.98	0.84										
150	1.21	1.45	1.36	1.44	0.94	1.02	1.04	0.93										
155	1.28	1.54	1.47	1.53	1.03	1.08	1.12	1.02										
160	1.38	1.61	1.58	1.60	1.12	1.14	1.16	1.04										
165	1.47	1.60	1.58	1.60	1.20	1.15	1.13	1.07										
170	1.48	1.50	1.56	1.49	1.26	1.11	1.12	1.08										
175	1.46	1.47	1.48	1.43	1.27	1.15	1.21	1.17										
180	1.43	1.44	1.46	1.42	1.38	1.40	1.42	1.38										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-04-09

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: