




AS3535-15W360

luminaire specification



# AS3535-15W360

COLORS CURVE LIGHTING WITH LIMITLESSNESS - AS3535 stylish lighting system, through the sublimation from straight line to curve, transformation from 2D to 3D, linear lighting is brought with a brand-new revolutionary experience. The basic modules can constitute standard circular luminaires with the diameter of 0.8m/1.5m/3.0m for independent application. Multiple light emitting directions are optional: lighting downward, lighting outward and lighting inward. The light emitting modes are optional according to the scenes as well, so as to create different atmospheres.

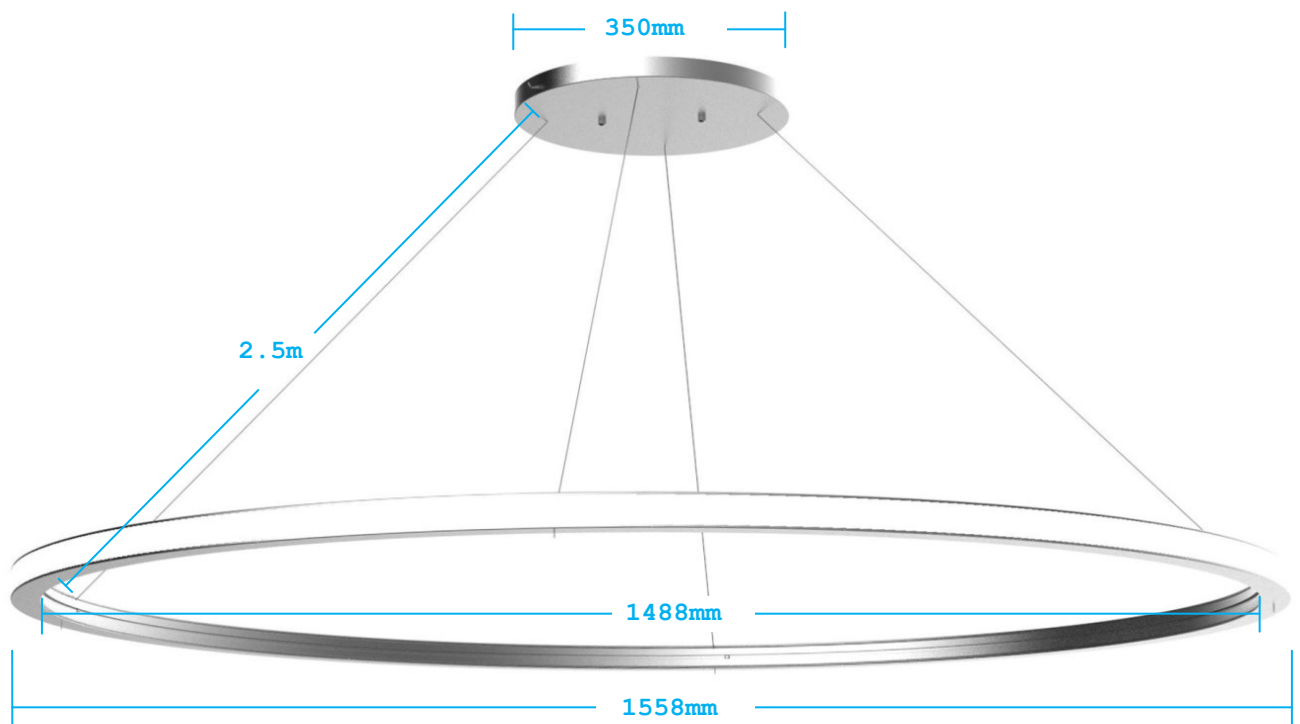


- $\Phi$  1.5M, circular luminaires of lighting outward;
- High quality surface treatment, three optional colors of black, white and silver;
- Adopt silicone flexible diffuser, producing homogenous & soft lighting;
- Pendant cable and wire in one, beautiful overall effect;
- Two installation ways: pendant and surface mounted.

# Optical & electronic data


Model	Size	CCT	Flux ( lm )	CRI	Beam angle	Input voltage	Dimming	PF	Power (w)
AS3535-15W360 (including power supply)	Φ1500mm, lighting outward, 360° luminaires	1900K	2240LM	>80	120°	220-240VAC 50/60Hz	Non dimming	>0.9	105W
		2300K	2360LM						
		2700K	2480LM						
		3000K	2610LM						
		3500K	2750LM						
		4000K	2890LM						
		5000K	3030LM						
		6000K	2890LM						

Remark :  
1、 the tolerance of output data can be vary up to 10%;  
2、 the output data is typical value;

Luminaire of 1.5m diameter and lighting outward matched with flexible diffuser（AS3535-15W360）

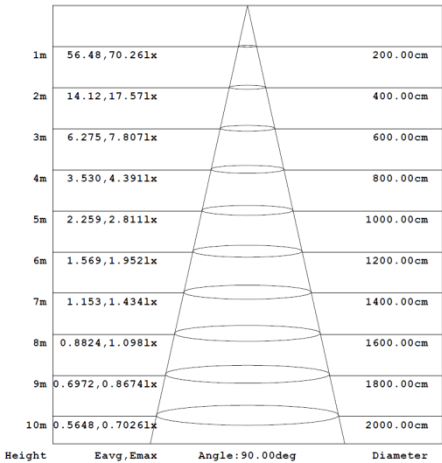


AAI FIGURE

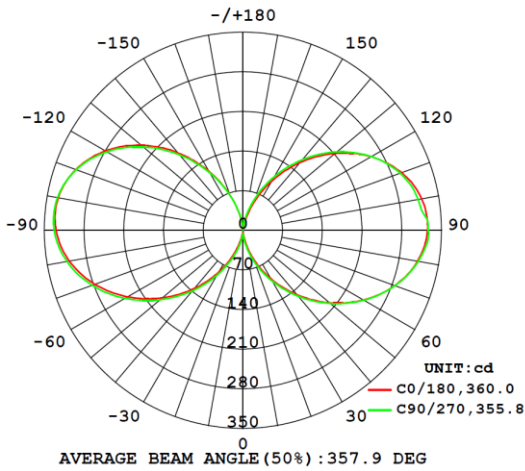

Luminous intensity distribution diagram

# Packing:

The whole package

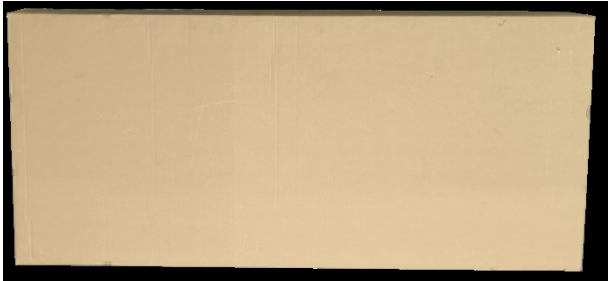


Model	Type	Demension ( individual package )	Pcs/bundle	NW (Kg)	GW (Kg)	Demension ( whole package )	CBM (m³)
AS3535-15W360 ( pendant / including power supply)	Box	1198*546*110mm	1	5.87	7.76	1198*546*110mm	0.072
AS3535-15W360 ( surface mounted / including power supply)				4.87	7.66		








## Description about label information


AS3535-15W360

Power(Typ): 105W  
CCT: 5800-6500K  
CRI: >80  
Input voltage: 100-277VAC  
Frequency: 50/60Hz



Type: Luminaire  
Part NO: LLS-AS3535FDXSS15W360-F105W8N-CC  
SO: YO17050147  
NO: ZWL170510-0380  
Color: Silver  
Cover type: Diffuser  
Size: D1500mm





[www.colorsled.com](http://www.colorsled.com)

# Ordering code:

Category		-Series		Section Size	Diffuser Shape		Diffuser Nature		Carrier Style		Profile Color		End Cap Style		Length	
Stylish Lighting System	LLS	-Arc pendant	-AS	3535	Flat	F	Diffuser	D	No carrier	X	Black	B	Holeless end cap	S	Φ1500mm, lighting outward, 360° luminaires	15W 360
											White	W				
											Silver	S				
LLS		-AS		3535	F		D		X		B		S		15W360	

Version Number		-Light Source Type		Type Power of Luminaire		CCT		CRI		Power Type		-Package		Label Type	
pendant	/	-24VDC Flexible strip	-F	105W (including power supply)	105	1900K	GW	CRI>80	8	Nondimming	N	-COLORS	-C	COLORS	C
surface mounted	(S)					2300K	LW	CRI>95	9					Customized	S
						2700K	SW								
						3000K	WW								
						3500K	PW								
						4000K	NW								
						5000K	DW								
		-F	105		NW		8		N		-C		C		

Ordering luminaires kits (Eg) :

**LLS-AS3535FDXBS15W360-FI05NW8N-CC**

## Attentions :

- Please install the product in the right environment as much as possible ;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock ;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit ;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.



**Huacai (Shenzhen) Opto-Electronics Co.,Ltd**  
 Building A5, Qixing Wisdom Park,Shiyan  
 Youth Road, Bao'an District, Shenzhen, China  
 E-mail: colors@colorsled.com  
 Tel: +86-755-2923 1888  
 www.colorsled.com