

# Specification

Curve Lighting System

AS3535-15W90





## AS3535-15W90




### Features



- Various installation ways: pendant, recessed and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver



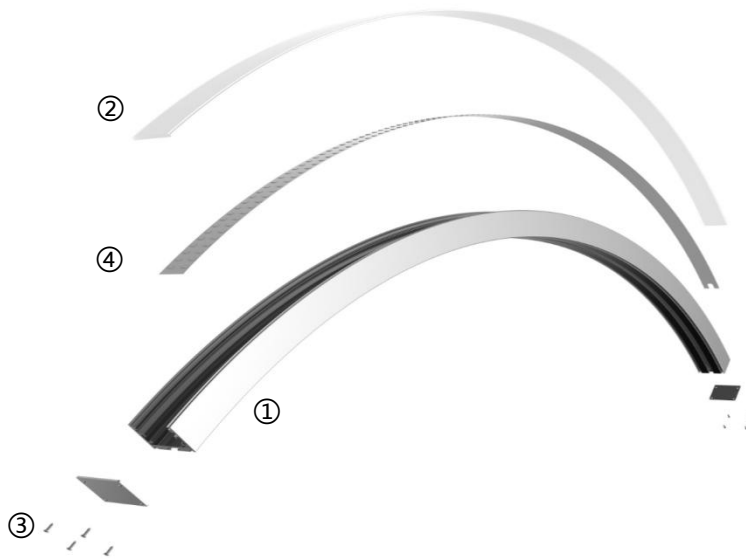


## Details



## Optional Accessories



Picture	Item	Parameter
	①Profile	Material : AL6063-T5 Profile weight : 0.97kg/ D1500mm , 45° Size : 35x35mm , D1500mm , 45° Surface processing: Spray
	②Cover	Size : L20000*W32*H3.5mm Light transmittance: 60%
	③End cap	Size : L35*W35*H1.5mm
	④Flexible strip D8140-24V-20mm	Material : AL,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80 ; Voltage : 24V ; Power : 19.2W/m ; Lumen : 2120Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs/98mm ;
	⑤Screw set	Size : M3.5*40mm



Picture	Item	Parameter
	Pendant cable PY-CBCA	Size : $\phi 350 \times H20$ mm
	Pendant cable PN-WA2/4	Steel cable: $D1.5 \times 2000 \setminus 4000$ mm\maximum load bearing:13Kg
	Pendant cable PN-CA2/4	Size : 20AWG\2000mm\maximum load bearing:6.5Kg
	Connect fitting EX-26	Size : L30*W23.5*H4.6mm
	Surface mounted buckle CL-04	

## Optical Parameter

AS3535-15W90 module\D8140-24V-20mm light source, frosted diffuser

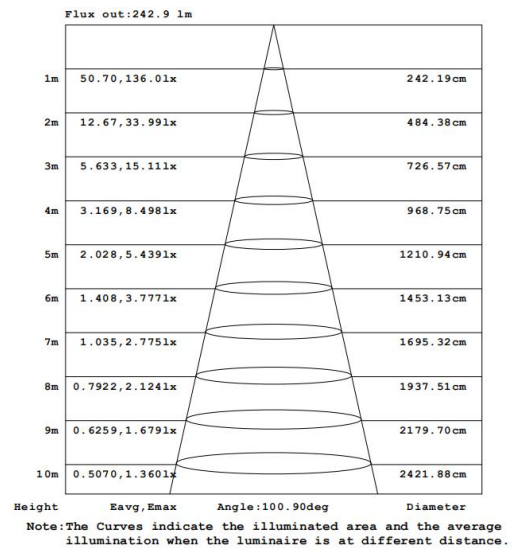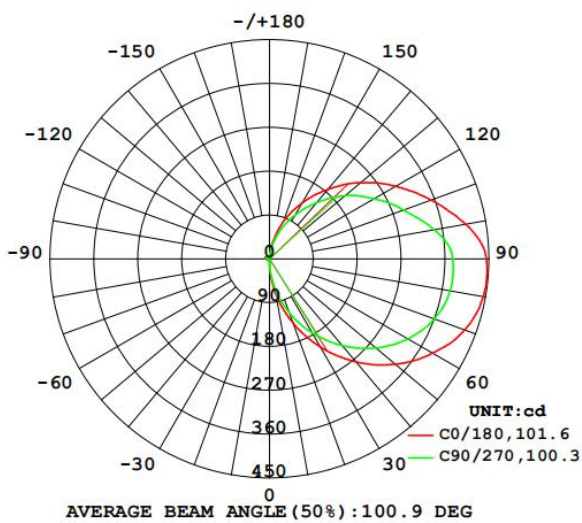

## Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
15W90	Hat box	1185*415*175mm	14.16	17.16	12pcs/box

