



LC25 Standard Luminaire Specification



LC25 **AC 220V** Standard luminaire



- Up and down lighting design with wall mounted way , 25mm slender lighting surface.
- Support no dimming/0-10V/DALI dimming
- Germany brand PC diffuser with uniform and soft light output
- Built-in power , invisible and beautiful.

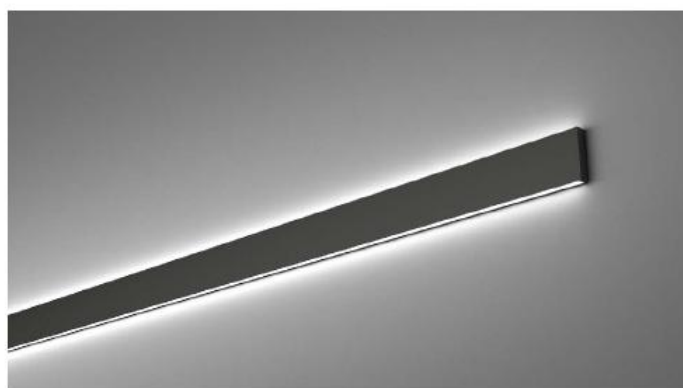



Basic Parameters

Profile material AL6063-T5

Surface processing Spraying RAL9003 ☐
 Spraying RAL9005 ☒ Anodizing ☐

CCT ☒ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6500K

CRI Ra80/Ra90* (*only for 2700K/3000K)

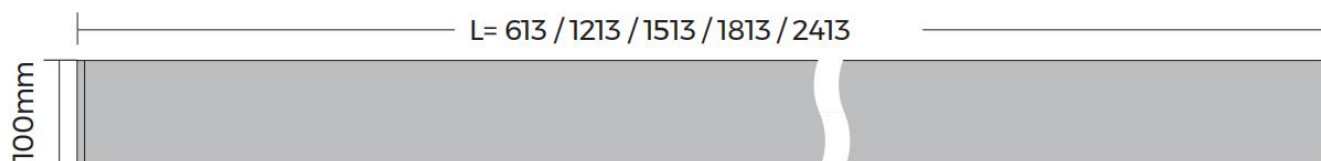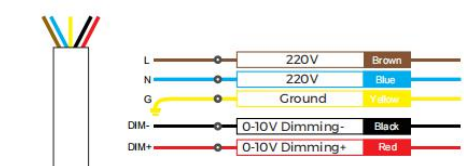

- Up and down lighting design with wall mounted way , 25mm slender lighting surface .
- Support no dimming/0-10V/DALI dimming
- Germany brand PC diffuser with uniform and soft light output
- Built-in power , invisible and beautiful .



Optical & electronic data

	600mm	1200mm	1500mm	1800mm	2400mm
Diffuser					
	Up: 7W/540LM Down: 7W/540LM	Up: 14W/1070LM Down: 14W/1070LM	Up: 19W/1340LM Down: 19W/1340LM	Up: 23W/1600LM Down: 23W/1600LM	Up: 29W/2140LM Down: 29W/2140LM


Remark:

- 1、 the tolerance of output data can be vary up to 10%;
- 2、 the output data is typical value;

1.2m luminaire with diffuser

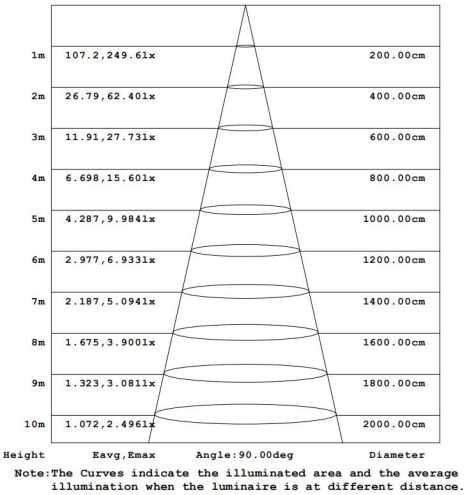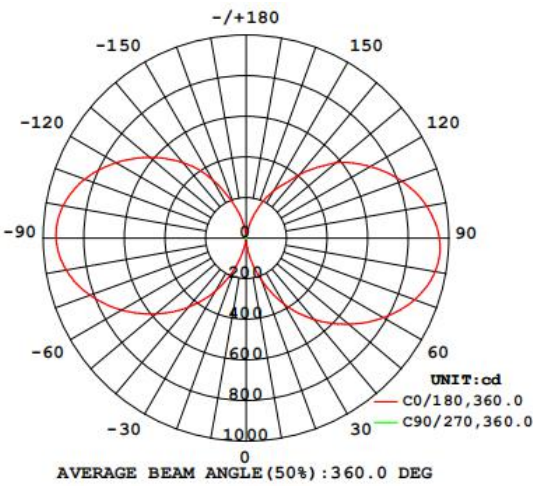

Packing:

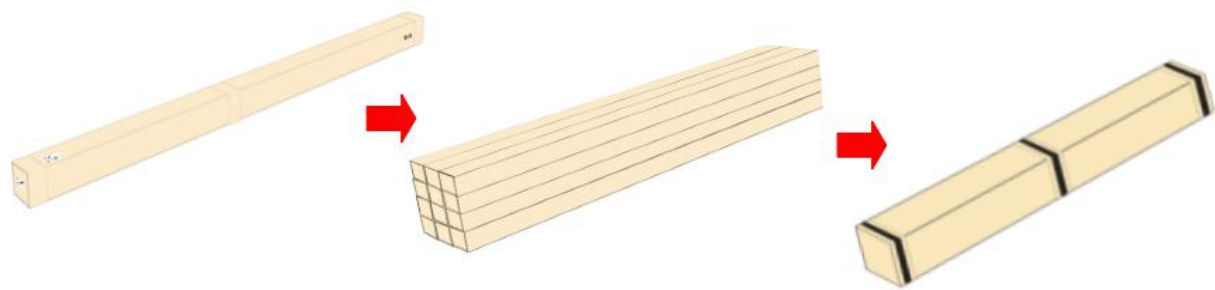

Cover	Length	Type	Size(mm)	Pcs/bundle	NW(kg)	GW(kg)	Size (whole package)
Diffuser	613mm	BOX	690*123*40mm	6pcs	/	/	690*275*230mm
	1213mm	BOX	1290*123*40mm	6pcs	/	/	1290*275*230mm
	1513mm	BOX	1590*123*40mm	6pcs	/	/	1590*275*230mm
	1813mm	BOX	1890*123*40mm	6pcs	/	/	1890*275*230mm
	2413mm	BOX	2580*123*40mm	6pcs	/	/	2580*275*230mm

Description about label information

LLS-LS5470(F)

Luminous flux: 1880LM

Power(Typ): 36W

CCT: 4000K

CRI: >80

Input voltage: 100-277VAC

Frequency: 50/60Hz

Type: Luminaire

Part NO: LLS-LS5470FDFSS1200(F)-R36NW8D-CC

SO: YO17050147

NO: ZWL170510-0380

Color: Silver

Power factor: >0.95

Cover type: Diffuser

Size: 54x70x1207mm

www.colorsled.com

Ordering code:

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	Light Source Power	CCT	CRI	Power Type	-	Package	Label Type														
LLS	-	Wall mounted Lighting upward & downward	LC	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	-	Constant Current Rigid	T	14W	14	2700K	SW	>80	8	Support no dimming	N	-	COLORS Individual	D	COLORS	C	
											White	W		1200mm					28W	28	3000K	WW	>90	9		0-10V			B		Customized	S
											Black	B		1500mm					39W	39	4000K	NW				DALI dimming			A			
													1800mm					46W	46	5000K	DW											
													2400mm					58W	58	6500K	W											
LLS	-		LC	25	F		D		X		S		S	2400	-		T		58		LW		8		B	-		D		C		
Ordering luminaires kits																			LLS-LC25FDXSS2400-T58NW8B-DC													

Ordering luminaires kits

LLS-LC25FDXSS2400-T58NW8B-DC



Attentions:

- Please install the product in the right environment as much as possible;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.



Huacai (Shenzhen) Opto-Electronics Co.,Ltd

Building A5, Qixing Wisdom Park, Shiyan
Youth Road, Bao'an District, Shenzhen, China
E-mail: colors@colorsled.com
Tel: +86-755-2923 1888
www.colorsled.com