



LH25 Standard Luminaire Specification



LH25 **4AC 220V** Standard luminaire



- Standard luminaire, Standard with Power box (built-in Constant current power supply) ,AC220V Plug-and-Play
- Support no dimming/0-10V/DALI dimming
- Up and down lighting design with suspension way , 25mm slender lighting surface .
- 100 Lm/w high light efficiency design,lumen output up to 3800Lm/m.
- Multiple light distribution options(Diffuser,Microprism,Grating 30°, Grating 60°)to meet variety application requirements
- Electric wire& suspension wire with two-in-one design, invisible and beautiful

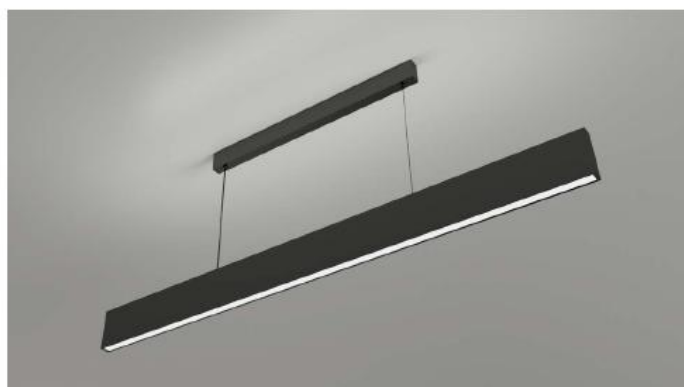




Basic Parameters

Profile material AL6063-T5

Surface processing Spraying RAL9003 ☐ Spraying RAL9005 ☒ Anodizing ☐

CCT ☒ 2700K ☐ 3000K ☐ 4000K ☐ 5000K ☐ 6500K

CRI Ra80/Ra90* (*only for 2700K/3000K)

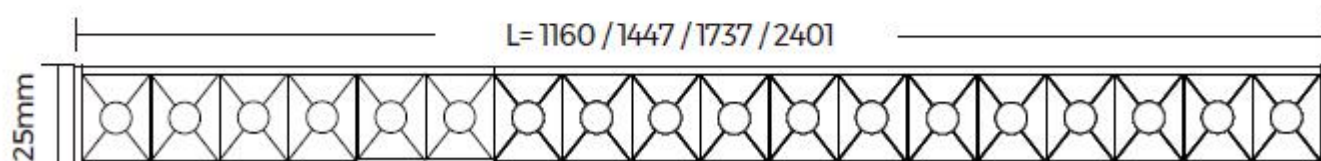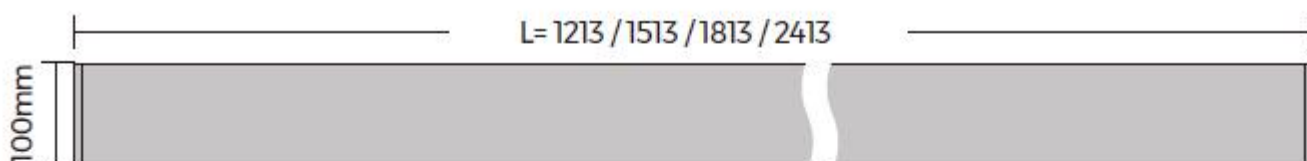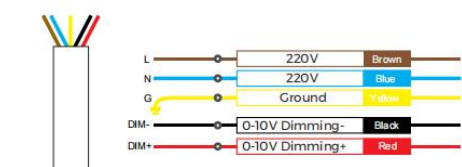





- Standard luminaire , Standard with Power box (built-in Constant current power supply) ,AC220V Plug-and-Play
- Support no dimming/0-10V/DALI dimming
- Up and down lighting design with suspension way , 25mm slender lighting surface .
- 100 Lm/w high light efficiency design , lumen output up to 3600 Lm/m .
- Multiple light distribution options (Diffuser , Microprism , Grating 30° , Grating 60°) to meet variety application requirements
- Electric wire& suspension wire with two-in-one design, invisible and beautiful

Optical & electronic data

		1200mm	1500mm	1800mm	2400mm
Diffuser		Up: 19W /1700LM Down: 19W /1900LM	Up: 23W / 2100LM Down: 23W /2300LM	Up: 28W /2600LM Down: 28W /2800LM	Up: 38W /3600LM Down: 38W /3800LM
Microprism		Up: 19W /1700LM Down: 19W /1900LM	Up: 23W / 2100LM Down: 23W /2300LM	Up: 28W /2600LM Down: 28W /2800LM	Up: 38W /3600LM Down: 38W /3800LM
Grating 30°		Up: 19W / 1570LM Down: 19W / 1310LM	Up: 23W /1900LM Down: 23W /1590LM	Up: 28W /2200LM Down: 28W /1930LM	Up: 38W / 3150LM Down: 38W /2620LM
Grating 60°		Up: 19W / 1570LM Down: 19W /1080LM	Up: 23W /1900LM Down: 23W /1330LM	Up: 28W /2200LM Down: 28W /1590LM	Up: 38W /3150LM Down: 38W /2150LM

- Remark:
- 1、the tolerance of output data can be vary up to 10%;
- 2、the output data is typical value;

Optical Parameter

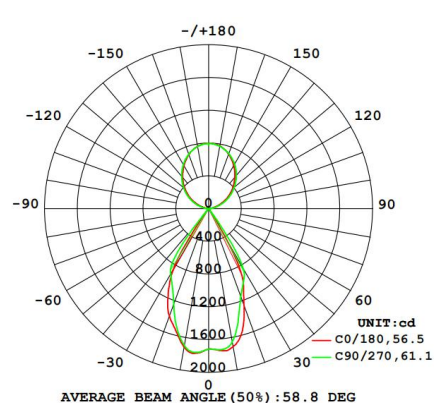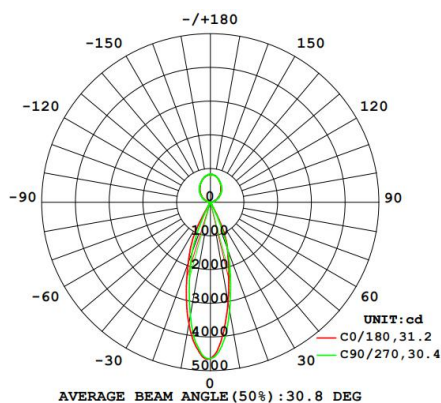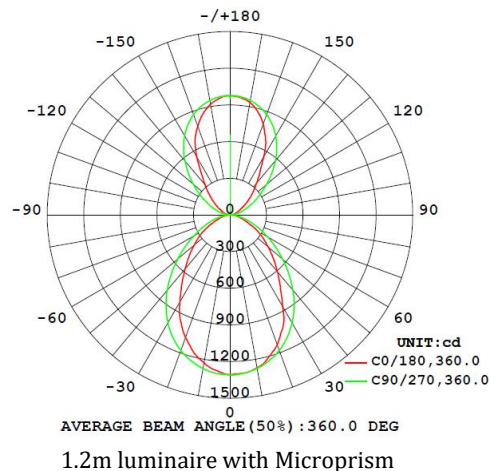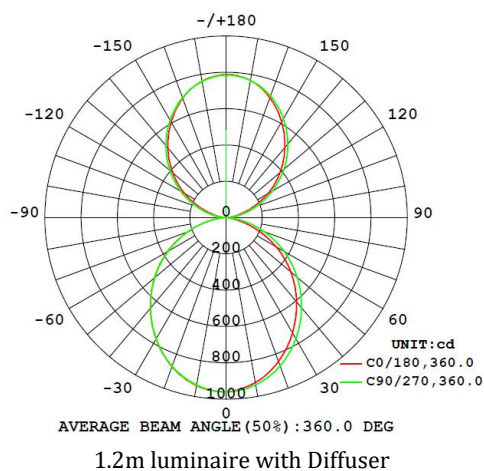

Packing:



Cover	Length	Type	Size(mm)	Pcs/bundle	NW(kg)	GW(kg)	Size (whole package)
Diffuser / Microprism,	613mm	BOX	1260*150*50mm	6pcs	18.12	21.24	1290*310*300mm
	1213mm	BOX	1560*150*50mm	6pcs	19.92	23.4	1590*310*300mm
	1513mm	BOX	1860*150*50mm	6pcs	21.72	25.8	1890*310*300mm
	1813mm	BOX	2467*150*50mm	6pcs	25.56	31.92	2580*310*300mm
	2413mm	BOX	1260*150*50mm	6pcs	14.52	17.88	1290*310*300mm
Grating	585mm	BOX	1560*150*50mm	6pcs	16.92	20.4	1590*310*300mm
	1160mm	BOX	1860*150*50mm	6pcs	19.74	22.74	1890*310*300mm
	1447mm	BOX	2467*150*50mm	6pcs	24.96	31.08	2580*310*300mm
	1737mm	BOX	1260*150*50mm	6pcs	18.12	21.24	1290*310*300mm
	2401mm	BOX	1560*150*50mm	6pcs	19.92	23.4	1590*310*300mm

Description about label information

LLS-LS5470(F)

Luminous flux: 1880LM

Power(Typ): 36W

CCT: 4000K

CRI: >80

Input voltage: 100-277VAC

Frequency: 50/60Hz

Type: Luminaire

Part NO: LLS-LS5470FDFSS1200(F)-R36NW8D-CC

SO: YO17050147


NO: ZWL170510-0380


Color: Silver


Power factor: >0.95

Cover type: Diffuser

Size: 54x70x1207mm







www.colorsled.com

Ordering code:

Category	-	Series	Section Size	Diffuser Shape	Diffuser Nature	Carrier Style	Profile Color	End Cap Style	Length	-	Light Source Type	LightSource Power	CCT	CRI	Power Type	-	Package	Label Type												
LLS	-	Pendant Lighting upwards downward	LH	25	Flat	F	Diffuser	D	NO Carrier	X	Silver	S	Holeless end cap	S	600mm	Constant Current Rigid	T	38W	38	2700K	SW	>80	8	Support no dimming	N	-	COLORS Individual	D	COLORS	C
					Grating	G	Micro-prism	P			White	W			1200mm				46W	46	3000K	WW	>90	9	0-10V	B			Customized	S
							30°	F			Black	B			1500mm				54W	54	4000K	NW			DALI dimming	A				
							60°	H							1800mm				76W	76	5000K	DW								
															2400mm						6500K	W								
LLS	-		LH	25	F	D	X	S	S	2400	-																			
Ordering luminaires kits																LLS-LH25FDXSS2400-T76NW8B-DC														

Attentions:

- Please install the product in the right environment as much as possible;
- Please be careful during operation. Do not touch the AC power supply in case of electric shock;
- Check the current through the circuit, such as the surge occurs when press the switch does not exceed the maximum rated current, please insert the appropriate protection circuit;
- This product is sensitive to static electricity, and please special attention. In particular, it will damage the product when the static electricity is more than absolute maximum rated current and voltage, please make a countermeasures to avoid the damage of the static electricity and surge when using the product.



Huacai (Shenzhen) Opto-Electronics Co.,Ltd
Building A5, Qixing Wisdom Park,Shiyan
Youth Road, Bao'an District, Shenzhen, China
E-mail: colors@colorsled.com
Tel: +86-755-2923 1888
www.colorsled.com