


Specification

Architecture lighting integration series

LR1616




LR1616

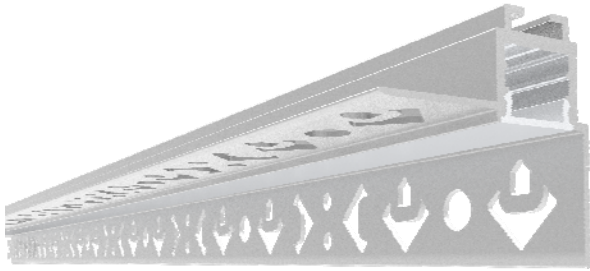

Features

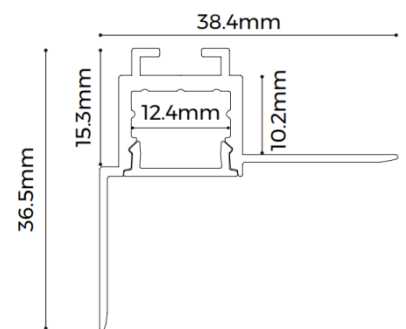


- 16mm luminous surface, rimless recessed design, integrated into architecture.
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting end cap design without screw, make installation more convenient.



Standard Configuration

| Picture | Item | Parameter |
|---|---------------------|---|
|  | Profile | Profile weight: 0.78kg/2.5m Size: L2500*W38.4*H36.5mm Material: AL6063-T5 Surface processing: Anodizing |
|  | Cover | Type: Frosted diffuse Material: PC Light transmittance: 60% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C. |
|  | Microprism diffuser | Type: Microprism diffuser Material: PC Light transmittance: 65% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C. |
|  | Black Microprism | Type: Black Microprism Material: PC Light transmittance: 15% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C. |
|  | End caps | Size: L16*W13*H7mm Material: PC |



Optional Accessories

| Picture | Item | Parameter |
|---|---------------------------------|---|
|  | Flexible strip D6140-24V-8mm | Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage:24V; Power: 8.6W/m; Lumen: 710Lm/m; PCB width: 8mm; Minimum cut: 50mm; |
|  | End cap with hole | Size: L16*W13*H7mm Material: PC |
|  | Screw | Size: M3.5*40mm Material: Carbon steel |




Optical Parameter

(D6140-24V-8mm light source, frosted diffuser)

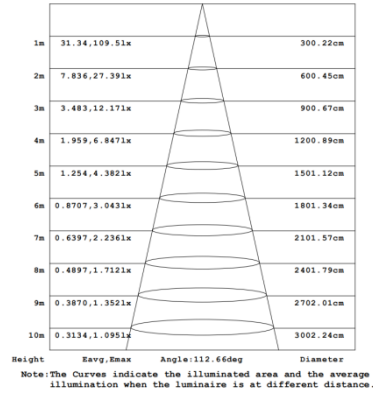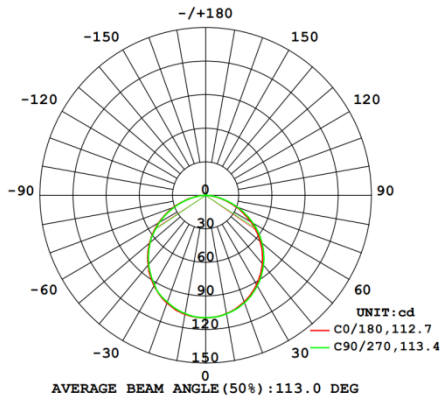

Package

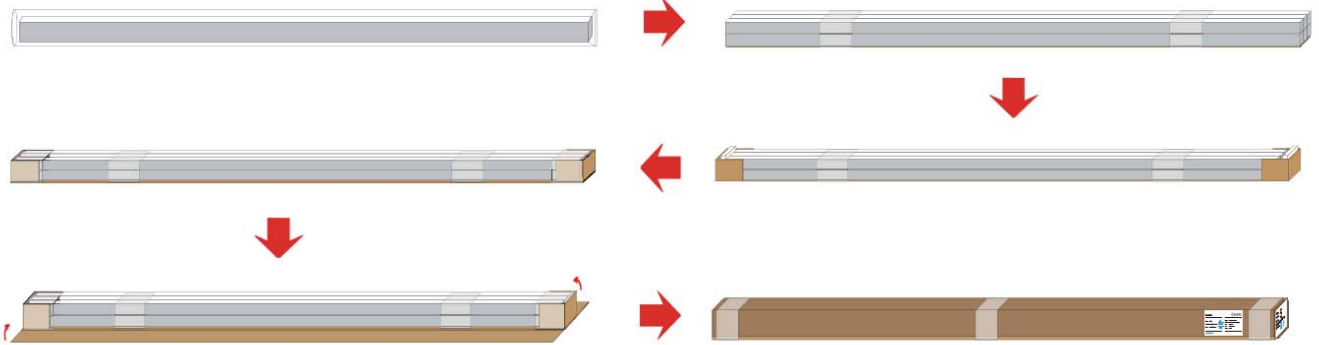

| Item | Type | Size(mm) | NW(kg) | GW(kg) | Content |
|-------------------|-------------|----------------|--------|--------|-----------|
| Profile and cover | Packing box | 2580*190*120mm | 15.84 | 18.84 | 18pcs/box |

