

Specification

Architecture lighting integration series

LR3924




LR3924






Features

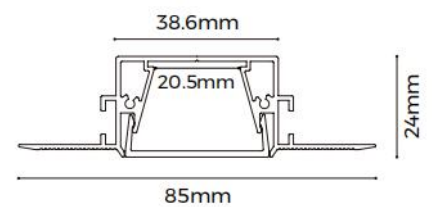

- 35mm luminous surface , rimless recessed design, integrated into architecture.
- PC diffuser made in Germany, products soft and comfortable lighting.
- AL6063-T5 aluminum profile with high-quality surface treatment.



Standard Configuration



Picture	Item	Parameter
	Profile	Profile weight : 1.6kg/2.5m Size : L2500*W85*H24mm Material : AL6063-T5 Surface processing : Anodizing
	Cover	Type: Frosted diffuser Material : PC Light transmittance : 70% Size : L2500*W34.2*H10.2mm PC Feature : The diffuser will extend (shrink) 0.8mm/m when the temperature rises (drops) 10°C.
	End caps	Size : L38.6*W24*H2mm Material : PC

Optional Accessories


Picture	Item	Parameter
	Flexible strip D8280-24V-20mm	Material :FPC,CCT:1900/2300/2700/3000/3500/4000/5000/6000K ; CRI > 80/>95 ;Voltage :24V ;Power : 20W/m ;Lumen :2700Lm/m ; Width : 20mm ; Minimum cutting unit : 14LEDs/50mm ;
	Screw	Size : M3.5*40mm Material : Carbon steel

Optical Parameter

(D8280-24V-20mm light source, frosted diffuser)

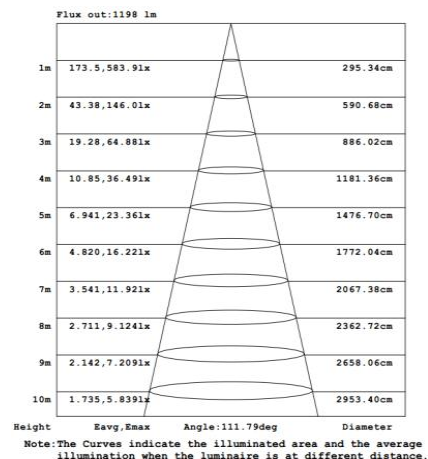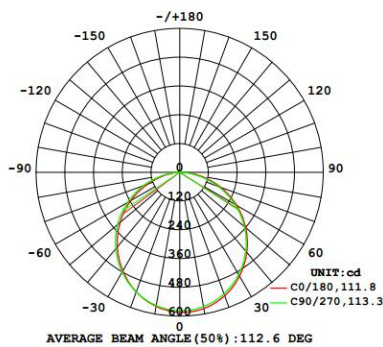

Package

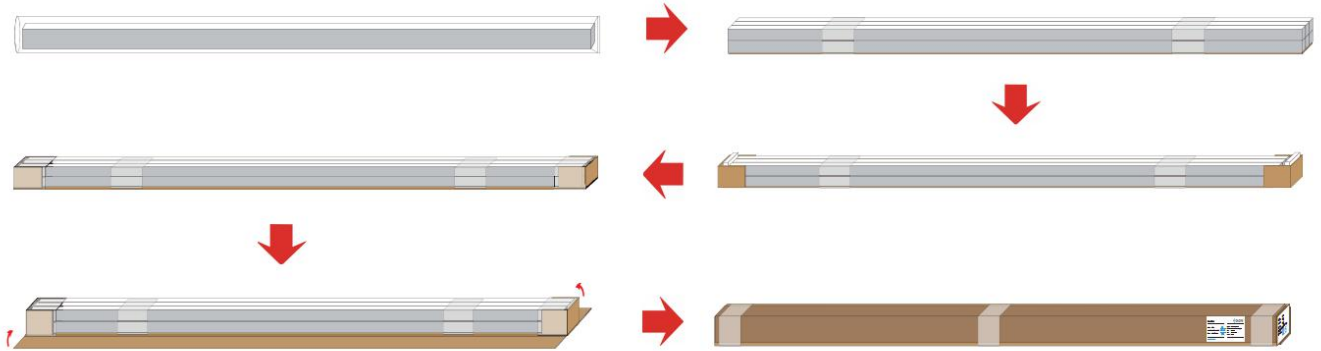

Item	Type	Size(mm)	NW(kg)	GW(kg)	Content
Profile and cover	Packing box	2580*200*175mm	18.94	21.94	12pcs/box

