
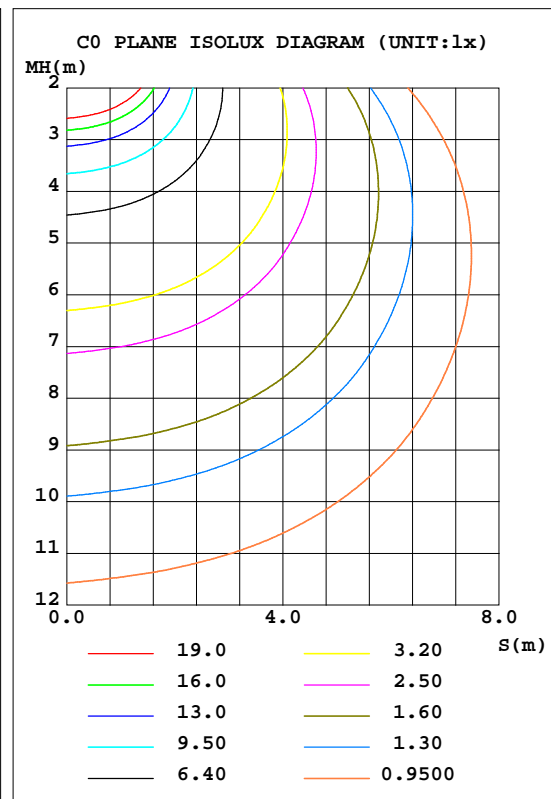


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.88lx1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
TLS-RNR30NJXBX1000-I14NW9X-BC		Imax(cd)	152.5	S/MH(C0/180)	1.63
NOMINAL POWER(W)	14	LOR(%)	100.0	S/MH(C90/270)	1.24
RATED VOLTAGE(V)	48	TOTAL FLUX(lm)	935.88	h UP, DN(C0-180)	15.8, 33.9
NOMINAL FLUX(lm)	935.881	CIE CLASS	SEMI-D.	h UP, DN(C180-360)	15.4, 35.0
LAMPS INSIDE	1	h up(%)	31.1	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	48	h down(%)	68.9	CIBSE SHR MAX	1.55

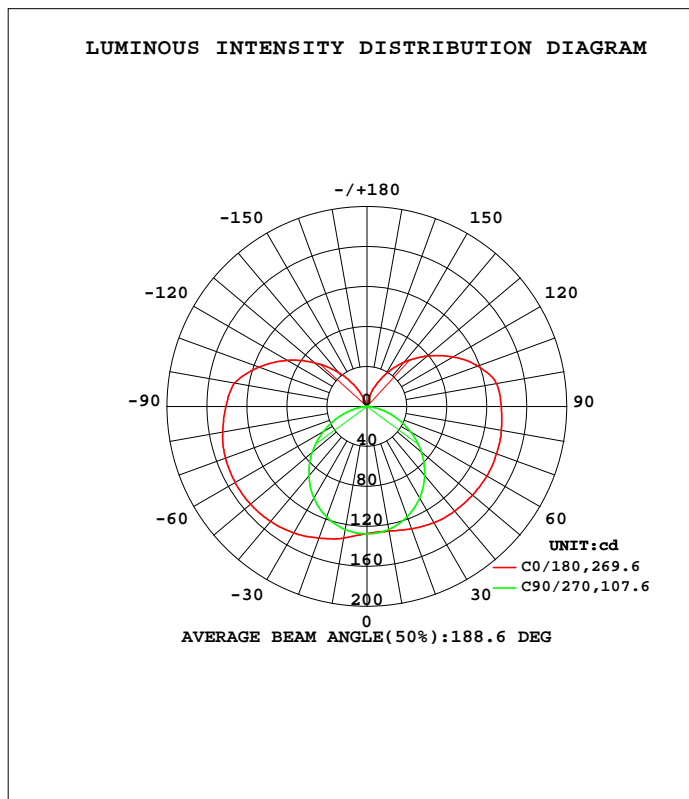

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


g	C0	C45	C90	C135	C180	C225	C270	C315	g	F zone	F total	%lum,lamp
10	126.7	125.0	124.9	130.1	133.6	130.8	125.1	124.6	0- 10	12.17	12.17	1.3,1.3
20	130.2	122.7	117.5	131.5	140.1	132.2	117.8	122.5	10- 20	36.11	48.28	5.16,5.16
30	134.3	119.4	105.7	129.5	146.2	130.2	106.1	119.3	20- 30	58.04	106.3	11.4,11.4
40	136.5	114.2	89.97	125.2	150.1	125.7	90.51	114.5	30- 40	76.14	182.5	19.5,19.5
50	137.9	107.0	71.26	118.8	152.2	118.9	71.77	107.5	40- 50	88.73	271.2	29,29
60	138.8	99.27	50.24	111.6	152.3	111.2	50.74	100.4	50- 60	95.27	366.5	39.2,39.2
70	138.0	93.11	28.54	104.3	150.7	103.6	28.90	94.67	60- 70	96.52	463.0	49.5,49.5
80	136.6	87.36	9.818	96.99	146.7	96.01	10.03	89.26	70- 80	93.39	556.4	59.4,59.4
90	134.4	83.50	1.091	90.18	141.2	88.78	0.8809	85.59	80- 90	88.09	644.5	68.9,68.9
100	131.6	80.73	0.6214	82.44	134.7	80.75	0.6550	74.06	90-100	83.47	727.9	77.8,77.8
110	118.2	68.61	0.7145	67.63	115.1	65.44	0.8886	67.61	100-110	72.58	800.5	85.5,85.5
120	99.56	47.52	1.029	49.71	92.55	46.26	1.150	53.21	110-120	55.93	856.4	91.5,91.5
130	78.71	34.01	1.275	34.58	68.17	32.20	1.403	39.47	120-130	38.14	894.6	95.6,95.6
140	58.08	21.92	1.472	20.05	44.52	18.07	1.597	27.62	130-140	23.52	918.1	98.1,98.1
150	37.09	11.88	1.670	7.057	22.69	6.228	1.817	17.65	140-150	11.81	929.9	99.4,99.4
160	19.22	5.924	1.990	2.932	5.619	2.887	2.091	9.433	150-160	4.463	934.4	99.8,99.8
170	2.707	3.311	2.338	2.464	2.023	2.545	2.378	4.084	160-170	1.267	935.6	100,100
180	2.124	2.665	2.585	2.592	2.084	2.598	2.678	2.545	170-180	0.2422	935.9	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.88lx1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

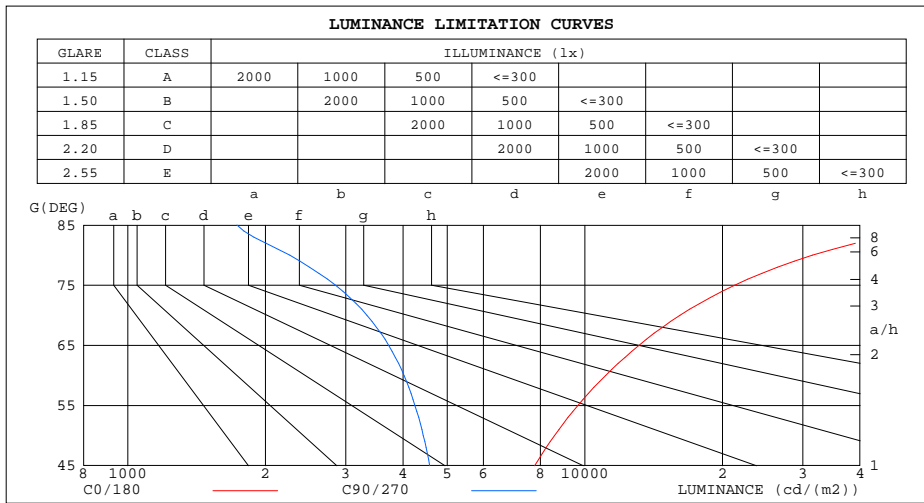

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	62119	1734
80	31476	2262
75	21259	2848
70	16143	3338
65	13131	3722
60	11102	4019
55	9651	4251
50	8584	4434
45	7765	4578


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

G Range: 0 - 180DEG
 G Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.88lx1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

r _{cc}	80%			70%			50%			30%			10%			0
r _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
r _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.12	1.12	1.12	1.05	1.05	1.05	.94	.94	.94	.83	.83	.83	.73	.73	.73	.69
1.0	.91	.85	.80	.86	.81	.76	.76	.72	.68	.66	.63	.60	.58	.55	.53	.49
2.0	.77	.69	.62	.73	.65	.59	.64	.58	.53	.56	.51	.47	.48	.45	.42	.38
3.0	.67	.57	.50	.63	.54	.48	.55	.48	.43	.48	.43	.38	.42	.37	.34	.30
4.0	.58	.49	.41	.55	.46	.39	.48	.41	.35	.42	.36	.32	.37	.32	.28	.25
5.0	.51	.42	.35	.48	.40	.33	.43	.35	.30	.37	.31	.27	.33	.28	.24	.21
6.0	.46	.36	.30	.43	.35	.28	.38	.31	.26	.34	.28	.23	.29	.24	.20	.18
7.0	.41	.32	.26	.39	.31	.25	.35	.27	.22	.30	.24	.20	.27	.22	.18	.15
8.0	.37	.29	.23	.35	.27	.22	.31	.25	.20	.28	.22	.18	.24	.19	.16	.13
9.0	.34	.26	.20	.32	.24	.19	.29	.22	.17	.25	.20	.16	.22	.18	.14	.12
10.0	.31	.23	.18	.30	.22	.17	.26	.20	.16	.23	.18	.14	.21	.16	.13	.11

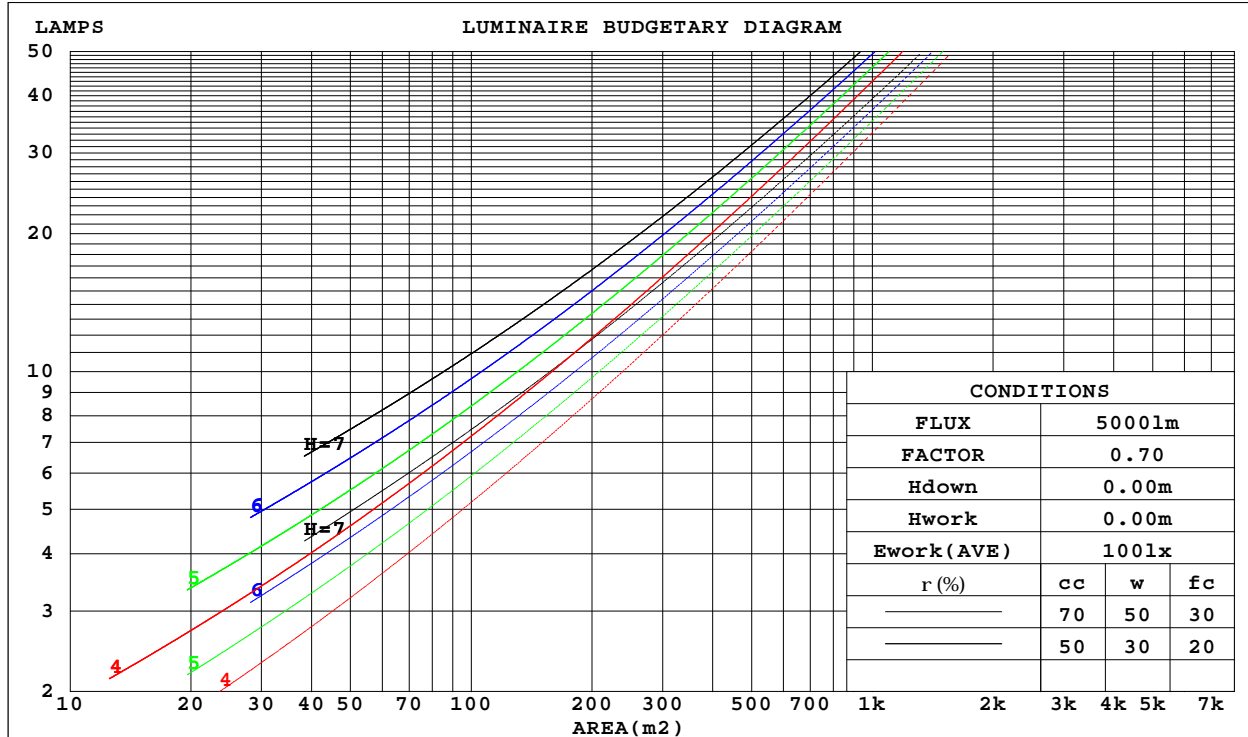

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.881x1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.410	.233	.074	.394	.225	.071	.362	.208	.066	.333	.192	.062	.307	.178	.057	
2.0	.346	.190	.058	.331	.182	.056	.302	.168	.052	.276	.155	.048	.252	.142	.045	
3.0	.303	.161	.048	.289	.155	.047	.263	.143	.043	.239	.131	.040	.217	.120	.037	
4.0	.271	.141	.041	.258	.135	.040	.234	.124	.037	.212	.114	.034	.192	.104	.032	
5.0	.245	.125	.036	.233	.120	.035	.211	.110	.032	.191	.101	.030	.172	.092	.028	
6.0	.223	.112	.032	.213	.107	.031	.193	.099	.029	.174	.091	.027	.157	.083	.025	
7.0	.205	.101	.029	.196	.097	.028	.177	.090	.026	.160	.082	.024	.144	.075	.022	
8.0	.190	.093	.026	.181	.089	.025	.164	.082	.023	.148	.075	.022	.133	.068	.020	
9.0	.177	.085	.024	.168	.082	.023	.153	.075	.021	.138	.069	.020	.124	.063	.018	
10.0	.165	.079	.022	.157	.076	.021	.143	.070	.020	.129	.064	.018	.116	.058	.017	

rcc	80%			70%			50%			30%			10%			0
rw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
rfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.428	.428	.428	.366	.366	.366	.250	.250	.250	.143	.143	.143	.046	.046	.046	
1.0	.426	.394	.366	.365	.339	.315	.250	.233	.218	.144	.135	.127	.046	.043	.041	
2.0	.420	.372	.332	.360	.321	.287	.247	.222	.200	.142	.129	.117	.046	.042	.038	
3.0	.413	.357	.312	.354	.308	.270	.243	.214	.190	.140	.125	.112	.045	.041	.037	
4.0	.405	.345	.298	.348	.298	.259	.239	.208	.182	.138	.122	.108	.045	.040	.035	
5.0	.398	.335	.289	.342	.290	.251	.235	.203	.178	.136	.119	.105	.044	.039	.035	
6.0	.390	.328	.283	.335	.284	.246	.231	.199	.174	.134	.117	.103	.043	.038	.034	
7.0	.383	.321	.278	.330	.278	.242	.228	.195	.171	.132	.115	.102	.043	.038	.034	
8.0	.376	.316	.274	.324	.274	.239	.224	.192	.169	.130	.113	.101	.042	.037	.033	
9.0	.370	.311	.271	.319	.270	.237	.221	.190	.168	.129	.112	.100	.042	.037	.033	
10.0	.364	.307	.269	.314	.267	.235	.218	.188	.167	.127	.111	.099	.041	.036	.033	

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.881x1 lm										
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC					TYPE:			WEIGHT:		
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC					DIM.: 1000*25*25mm			SERIAL No.:		
MFR.: COLORS					SUR.:1000*25mm			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.4	20.6	20.0	21.3	22.1	15.9	17.2	16.6	17.8	18.7
3H	22.7	23.8	23.4	24.6	25.4	17.4	18.6	18.1	19.3	20.2
4H	24.6	25.7	25.3	26.4	27.3	18.0	19.1	18.7	19.9	20.7
6H	26.7	27.7	27.4	28.5	29.4	18.4	19.5	19.2	20.2	21.1
8H	27.9	28.9	28.6	29.6	30.5	18.6	19.6	19.3	20.3	21.2
12H	29.2	30.2	30.0	30.9	31.9	18.6	19.6	19.4	20.4	21.3
4H 2H	19.9	21.0	20.6	21.7	22.6	17.5	18.6	18.3	19.4	20.3
3H	23.4	24.4	24.2	25.1	26.1	19.5	20.4	20.2	21.2	22.1
4H	25.5	26.4	26.2	27.1	28.1	20.4	21.2	21.1	22.0	23.0
6H	27.8	28.6	28.6	29.4	30.4	21.1	21.9	21.9	22.7	23.7
8H	29.1	29.9	29.9	30.7	31.7	21.4	22.1	22.2	22.9	23.9
12H	30.6	31.3	31.4	32.1	33.2	21.6	22.2	22.4	23.1	24.1
8H 4H	25.8	26.5	26.6	27.4	28.4	22.0	22.8	22.9	23.6	24.6
6H	28.4	29.1	29.3	29.9	30.9	23.3	23.9	24.1	24.8	25.8
8H	29.9	30.5	30.8	31.4	32.4	23.9	24.5	24.7	25.3	26.4
12H	31.7	32.2	32.6	33.1	34.1	24.4	24.9	25.2	25.7	26.8
12H 4H	25.8	26.5	26.6	27.3	28.4	22.6	23.3	23.4	24.1	25.2
6H	28.5	29.1	29.4	30.0	31.0	24.2	24.8	25.1	25.6	26.7
8H	30.2	30.7	31.0	31.5	32.6	25.0	25.5	25.9	26.4	27.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.2				
2.0H	+ 0.3 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 935.9 lm Total Lamp Luminous Flux Correct (8log(F/F0) = -0.2)

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.881x1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	42	29	22	40	29	21	38	27	21	14
0.80	51	37	29	49	36	28	45	34	27	19
1.00	58	44	35	56	43	35	51	43	33	23
1.25	65	51	42	62	49	41	57	46	39	27
1.50	70	57	47	67	55	46	61	50	43	31
2.00	78	65	56	74	63	54	66	57	50	36
2.50	82	71	62	78	68	60	70	62	55	40
3.00	86	76	67	82	72	65	73	66	59	43
4.00	91	82	75	86	78	72	77	71	65	47
5.00	95	87	80	89	82	76	80	74	69	50
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

g Range: 0 - 180DEG
 g Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.88lx1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

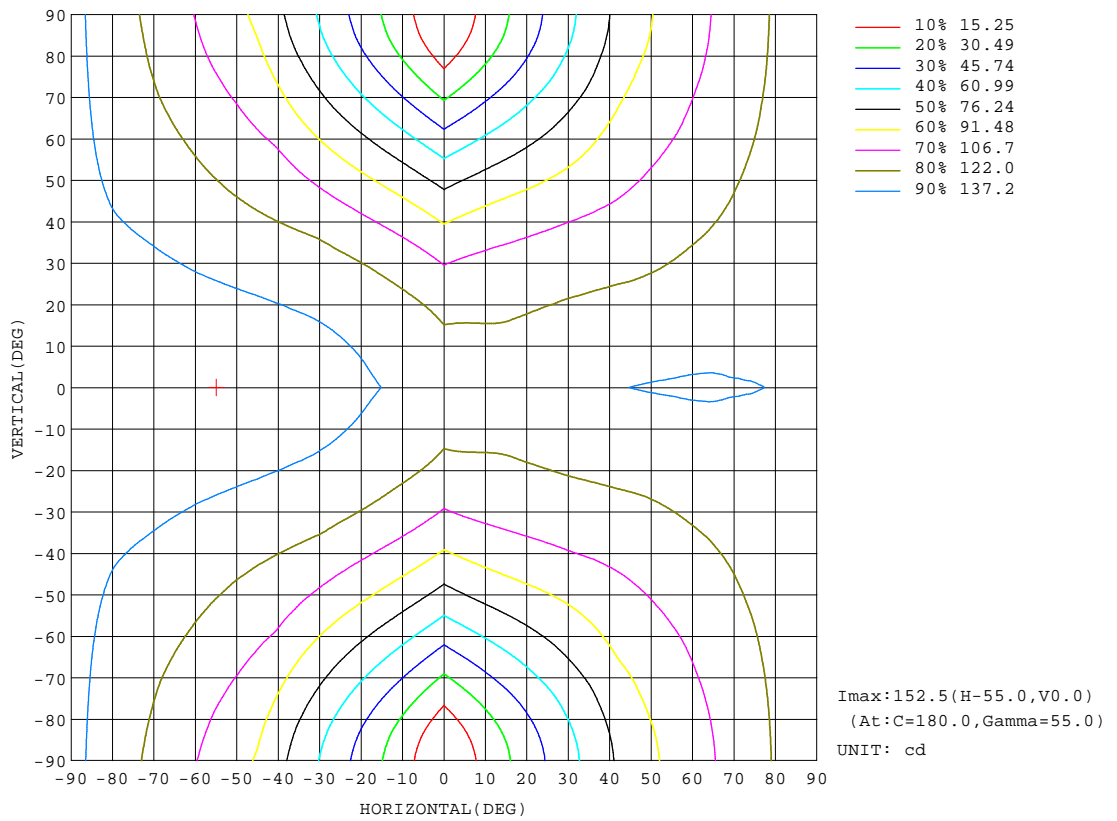


C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

AAI Figure

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.88lx1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

Flux out:308.8 lm

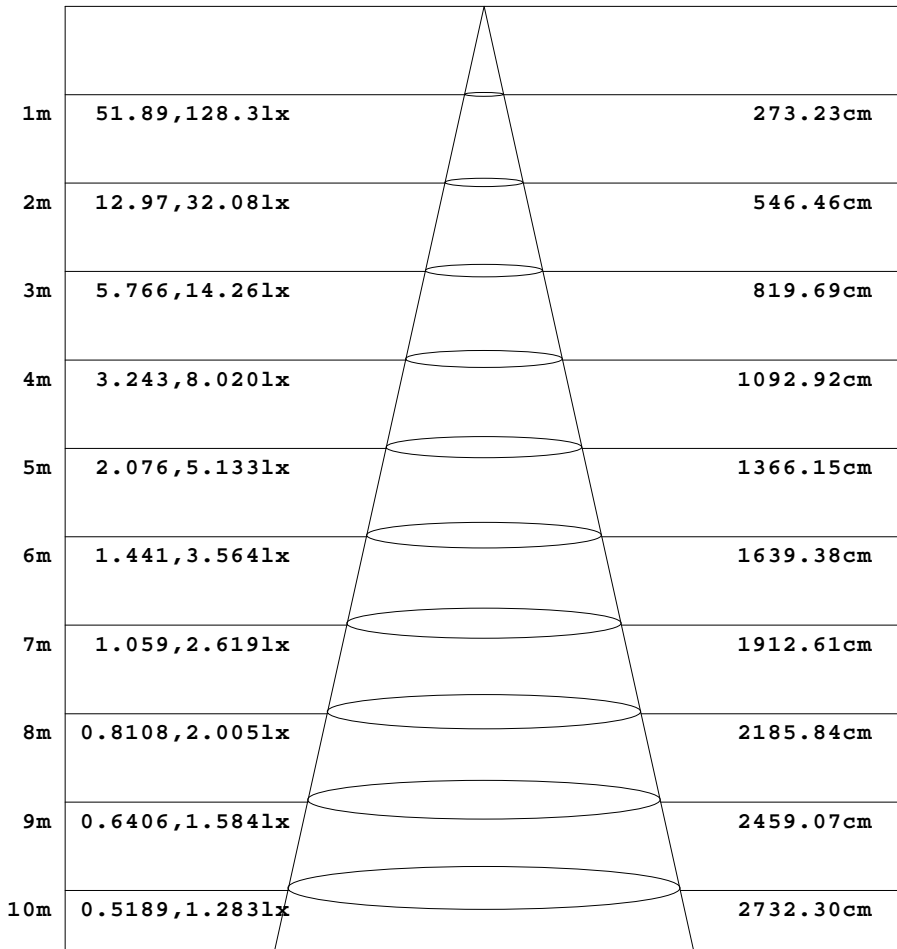

Height Eavg, Emax Angle:107.59deg Diameter


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.881x1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

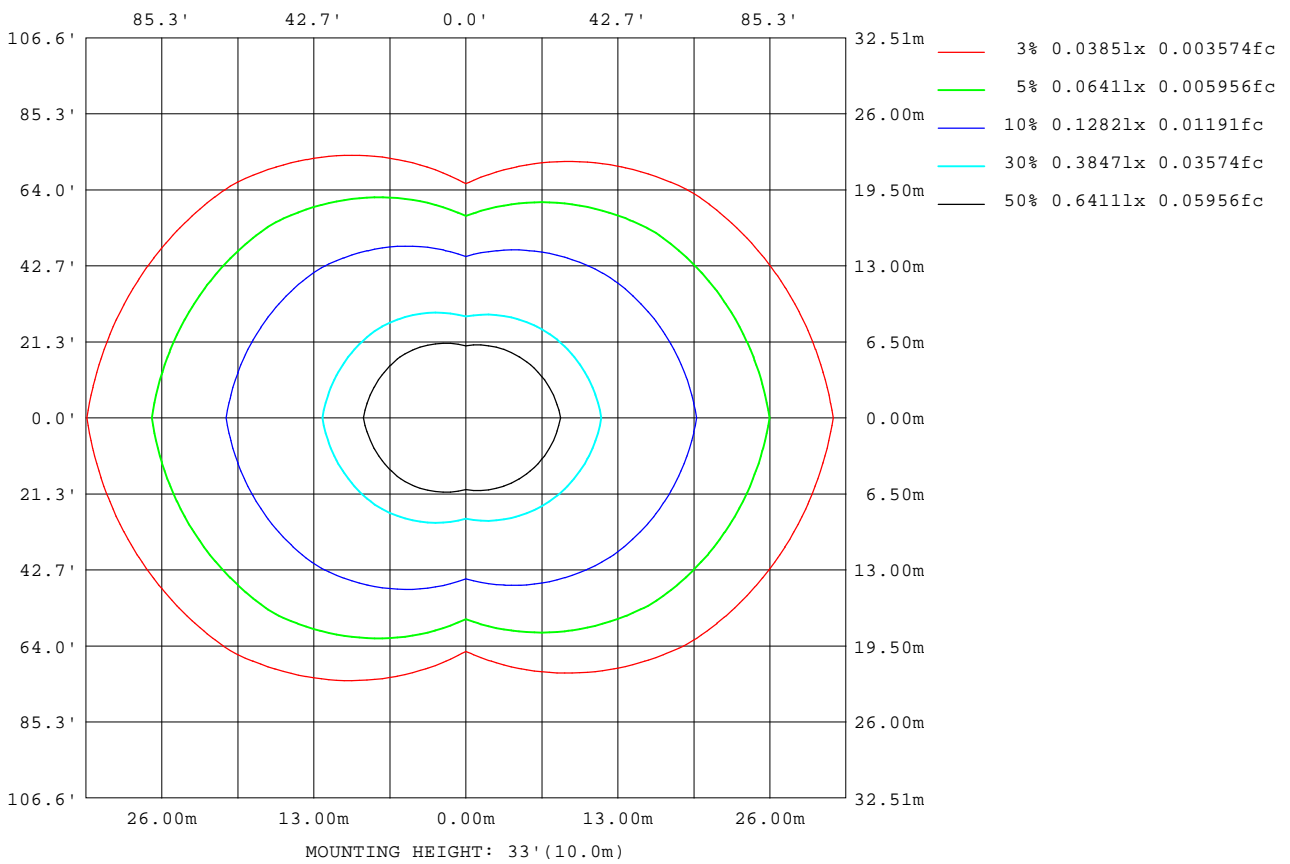

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks:

Planar Illuminance Curve

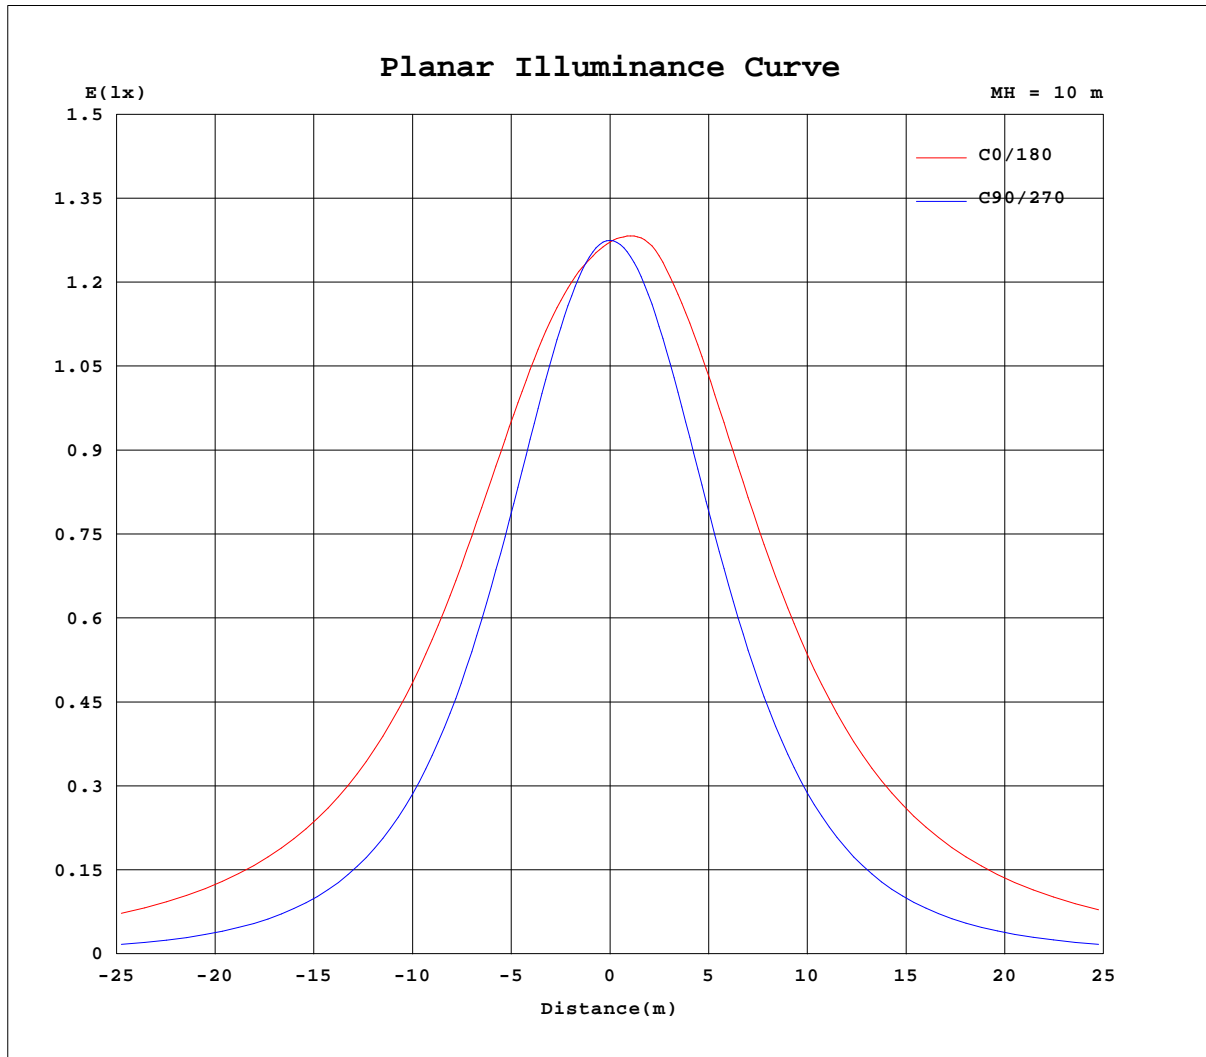

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: JYH
 Test Date: 2020-09-15

Page Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System: EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity: 65.0%
 Test Distance: 10.950m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:48.00V I:0.2960A P:14.20W PF:1.000 Freq:49.99Hz Lamp Flux:935.881x1 lm		
NAME: TLS-RNR30NJXBX1000-I14NW9X-BC	TYPE:	WEIGHT:
SPEC.: TLS-RNR30NJXBX1000-I14NW9X-BC	DIM.: 1000*25*25mm	SERIAL No.:
MFR.: COLORS	SUR.:1000*25mm	Shielding Angle:

Table--1

UNIT: cd

C(DEG) g (DEG)	0	45	90	135	180	225	270	315										
0	127	128	127	127	127	128	127	127										
5	126	126	127	129	130	129	127	126										
10	127	125	125	130	134	131	125	125										
15	128	124	122	131	137	132	122	124										
20	130	123	117	131	140	132	118	122										
25	132	121	112	131	143	131	113	121										
30	134	119	106	130	146	130	106	119										
35	136	117	98.3	128	148	128	98.7	117										
40	137	114	90.0	125	150	126	90.5	115										
45	137	111	80.9	122	151	122	81.5	111										
50	138	107	71.3	119	152	119	71.8	108										
55	138	103	61.0	115	152	115	61.4	104										
60	139	99.3	50.2	112	152	111	50.7	100										
65	139	96.1	39.3	108	152	107	39.7	97.4										
70	138	93.1	28.5	104	151	104	28.9	94.7										
75	138	89.9	18.4	101	149	99.9	18.8	91.6										
80	137	87.4	9.82	97.0	147	96.0	10.0	89.3										
85	135	85.0	3.78	93.3	144	92.0	3.81	87.0										
90	134	83.5	1.09	90.2	141	88.8	0.88	85.6										
95	134	82.8	0.67	87.6	139	86.2	0.49	84.4										
100	132	80.7	0.62	82.4	135	80.8	0.65	74.1										
105	126	75.8	0.62	75.3	126	73.3	0.73	73.0										
110	118	68.6	0.71	67.6	115	65.4	0.89	67.6										
115	110	60.9	0.82	58.8	104	55.3	1.02	60.7										
120	99.6	47.5	1.03	49.7	92.6	46.3	1.15	53.2										
125	89.1	39.2	1.15	42.0	80.4	39.7	1.28	45.8										
130	78.7	34.0	1.28	34.6	68.2	32.2	1.40	39.5										
135	68.3	28.1	1.36	27.3	56.4	25.0	1.50	33.5										
140	58.1	21.9	1.47	20.1	44.5	18.1	1.60	27.6										
145	47.8	16.5	1.56	13.2	33.3	11.7	1.70	22.3										
150	37.1	11.9	1.67	7.06	22.7	6.23	1.82	17.7										
155	27.4	8.29	1.80	4.26	13.0	3.91	1.94	13.3										
160	19.2	5.92	1.99	2.93	5.62	2.89	2.09	9.43										
165	11.2	4.32	2.20	2.49	2.85	2.61	2.24	6.42										
170	2.71	3.31	2.34	2.46	2.02	2.54	2.38	4.08										
175	2.25	2.67	2.50	2.50	1.88	2.54	2.51	2.60										
180	2.12	2.67	2.58	2.59	2.08	2.60	2.68	2.54										

C Range: 0 - 360DEG
 C Interval: 45.0DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:JYH
 Test Date:2020-09-15

g Range: 0 - 180DEG
 Interval: 1.0DEG
 Test System:EVERFINE GO-2000A_V1 SYSTEM V2.0.362
 Humidity:65.0%
 Test Distance:10.950m [K=1.0000]
 Remarks: